



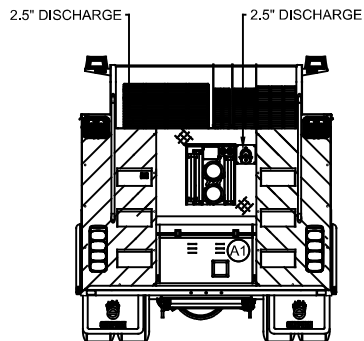

HOSE LOAD
- 400' OF 3"
- 200' OF 2.5"
- 250' OF 1.75"
- 800' OF 5"

LADDER CHUTE
24' 2 SEC
14' ROOF
10' FOLDING
(2) 10' 6" SUCTION
(2) PIKE POLES


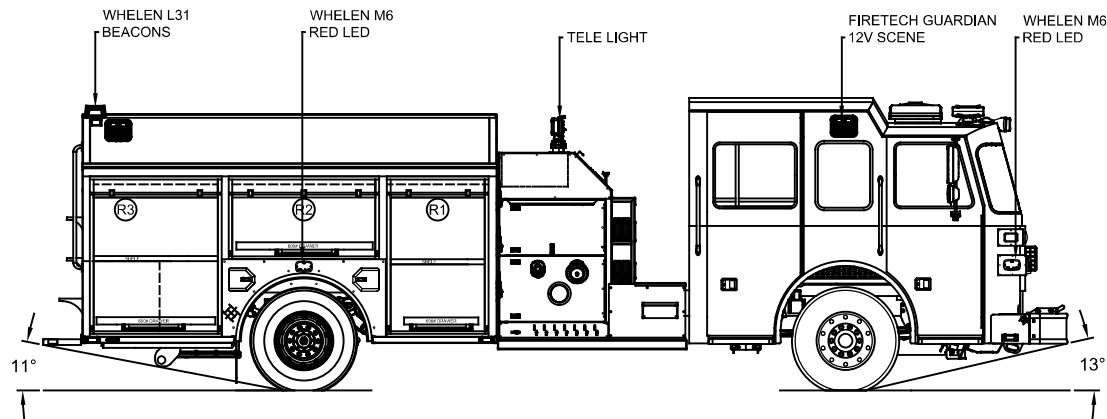


LEFT SIDE COMPARTMENTS				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
L1	ROLL-UP	37.5" w X 56.5" h	40" w X 66" h X 26" d	37.4 CU. FT. (8" h X 11" d UPPER)
L2	ROLL-UP	56.25" w X 27" h	59" w X 31.5" h X 26" d	28.4 CU. FT. (8" h X 11" d UPPER)
L3	ROLL-UP	48.75" w X 56.5" h	51.5" w X 66" h X 26" d	47.4 CU. FT. (8" h X 11" d UPPER)


RIGHT SIDE COMPARTMENTS				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
R1	ROLL-UP	37.5" w X 56.5" h	40" w X 66" h X 26" d	37.4 CU. FT. (8" h X 11" d UPPER)
R2	ROLL-UP	56.25" w X 27" h	59" w X 31.5" h X 26" d	28.4 CU. FT. (8" h X 11" d UPPER)
R3	ROLL-UP	48.75" w X 56.5" h	51.5" w X 66" h X 26" d	47.4 CU. FT. (8" h X 11" d UPPER)

REAR STEP COMPARTMENT				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
A1	ROLL-UP	36.75" w X 19" h	39.5" w X 28" h X 31" d	19.8 CU. FT.

TOTAL: 246.2 CU.FT.

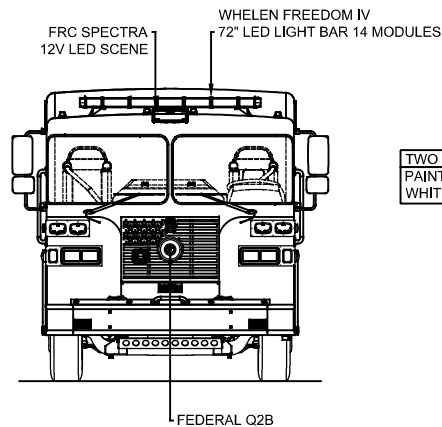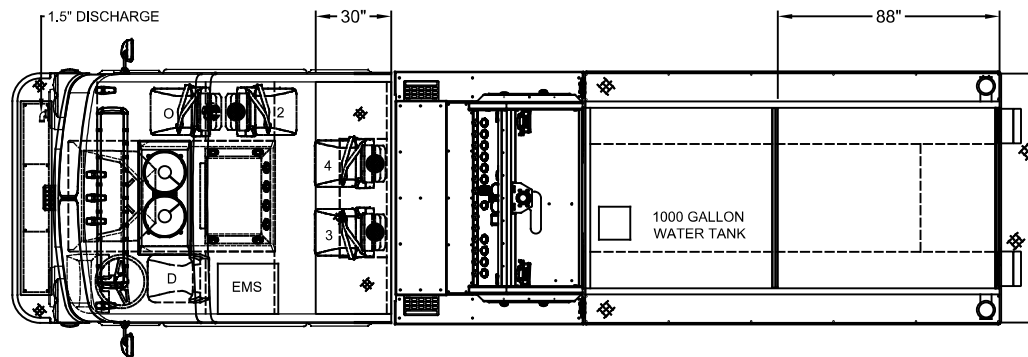

TWO TONE CAB
PAINT BREAK #3
WHITE OVER RED

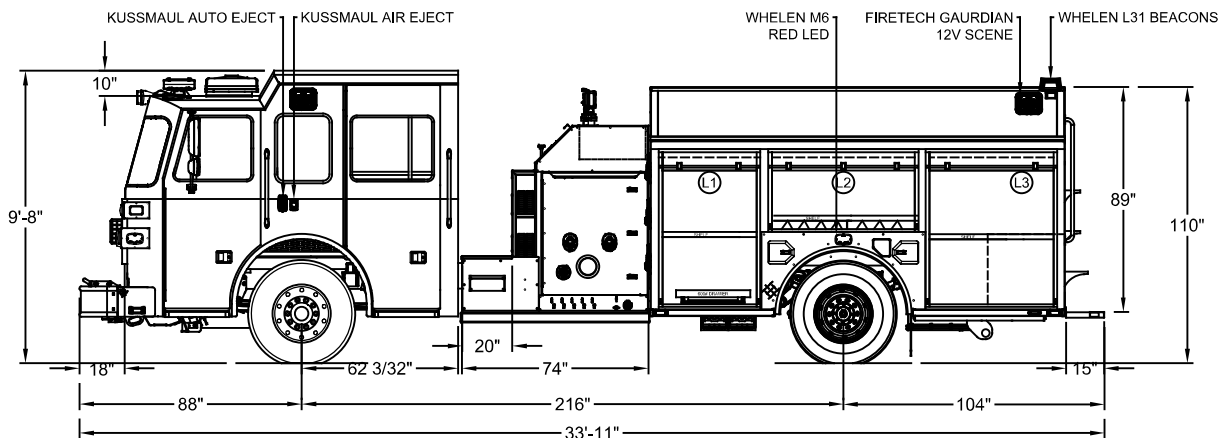

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.

IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.

DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.

CUSTOMER APPROVAL	
NAME:	
TITLE:	
DATE:	

INT	PRE-REV-A SHOP ORDER RELEASE	AG	7/11/24
REV.	DESCRIPTION	BY	DATE
THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.			

DRAWN BY:	A. GONZALEZ
DATE:	03/14/24
MFG. FACILITY:	URBANA


CITY OF LORAIN FIRE DEPARTMENT LORAIN, OH
CUSTOM PUMPER - G9
HS-7723