


HOSE BED
 250' OF 1.75"
 250' OF 1.75"
 1000' OF 5"
 500' OF 3"
 250' OF 2.5"
 250' OF 2.5"

LADDER RACK
 (1) 24' 2-SECT
 (1) 14' ROOF
 (1) 10' FOLDING

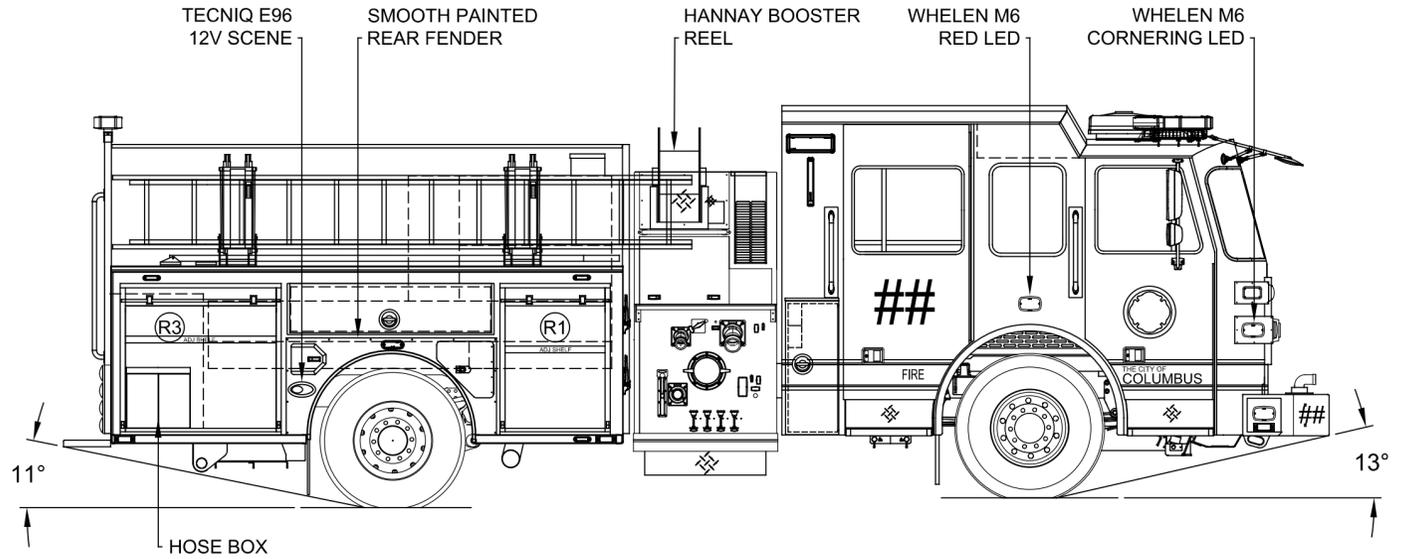


LEFT SIDE COMPARTMENTS				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
L1	ROLL-UP	30.5" w X 55.4" h	36.1" w X 66" h X 27.3" d	35.5 CU. FT.
L2	ROLL-UP	57.5" w X 26.2" h	61.6" w X 36.8" h X 12.5" d	13.8 CU. FT.
L3	ROLL-UP	45.5" w X 55.4" h	48.4" w X 66" h X 27.3" d	38.2 CU. FT.
P1	LIFT UP	44" w X 56" h	23" w X 15.75" h X 30" d	6.3 CU. FT.

(6" X 12" d UPPER)
 (26" h X 12" d UPPER)


RIGHT SIDE COMPARTMENTS				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
R1	ROLL-UP	30.5" w X 39.9" h	36.1" w X 47.3" h X 27.3" d	27.0 CU. FT.
R2	HINGED	57.5" w X 15.7" h	61.6" w X 20.3" h X 12.5" d	8.8 CU. FT.
R3	ROLL-UP	50.5" w X 36.9" h	48.4" w X 47.3" h X 27.3" d	28.4 CU. FT.

(16.6" h X 12" d UPPER)


REAR STEP COMPARTMENT				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
A1	ROLL-UP	37.5" w X 30.8" h	40" h X 40" w X 26" d	24.1 CU. FT.
				TOTAL: 180.0 CU. FT.

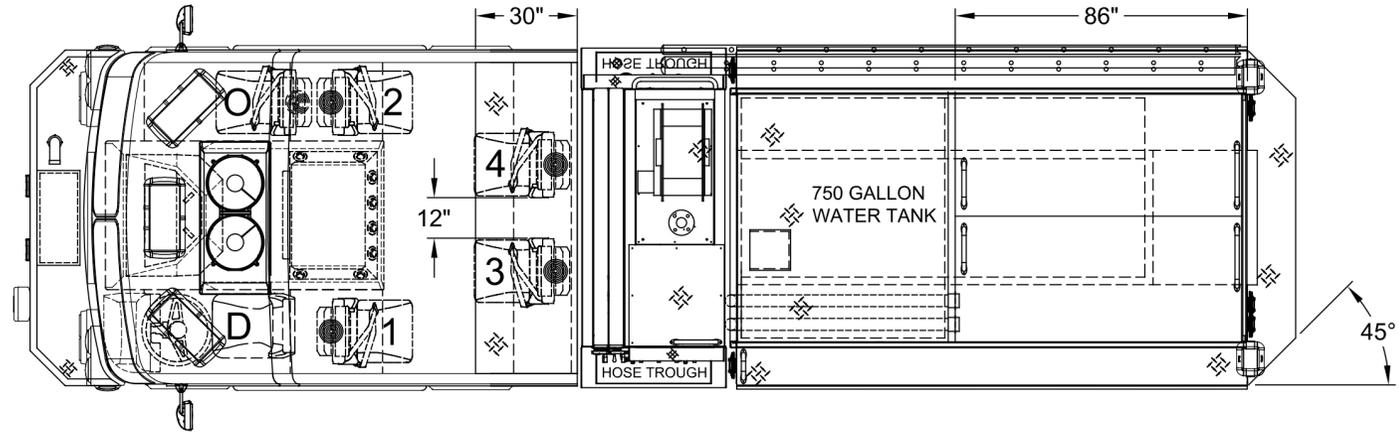

MAX HEIGHT
 11'-0"

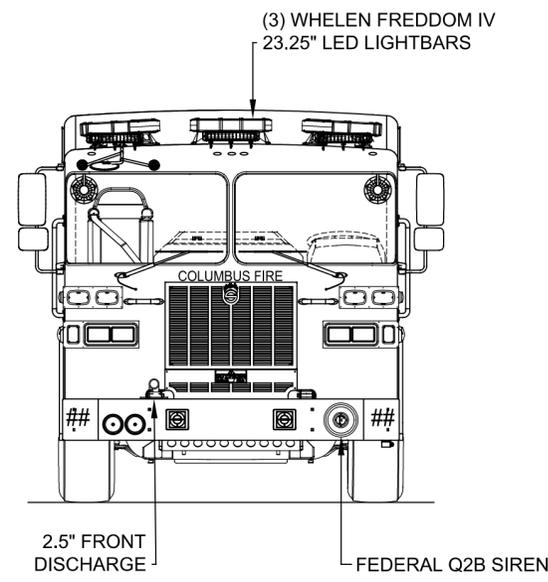

SINGLE TONE
 RED

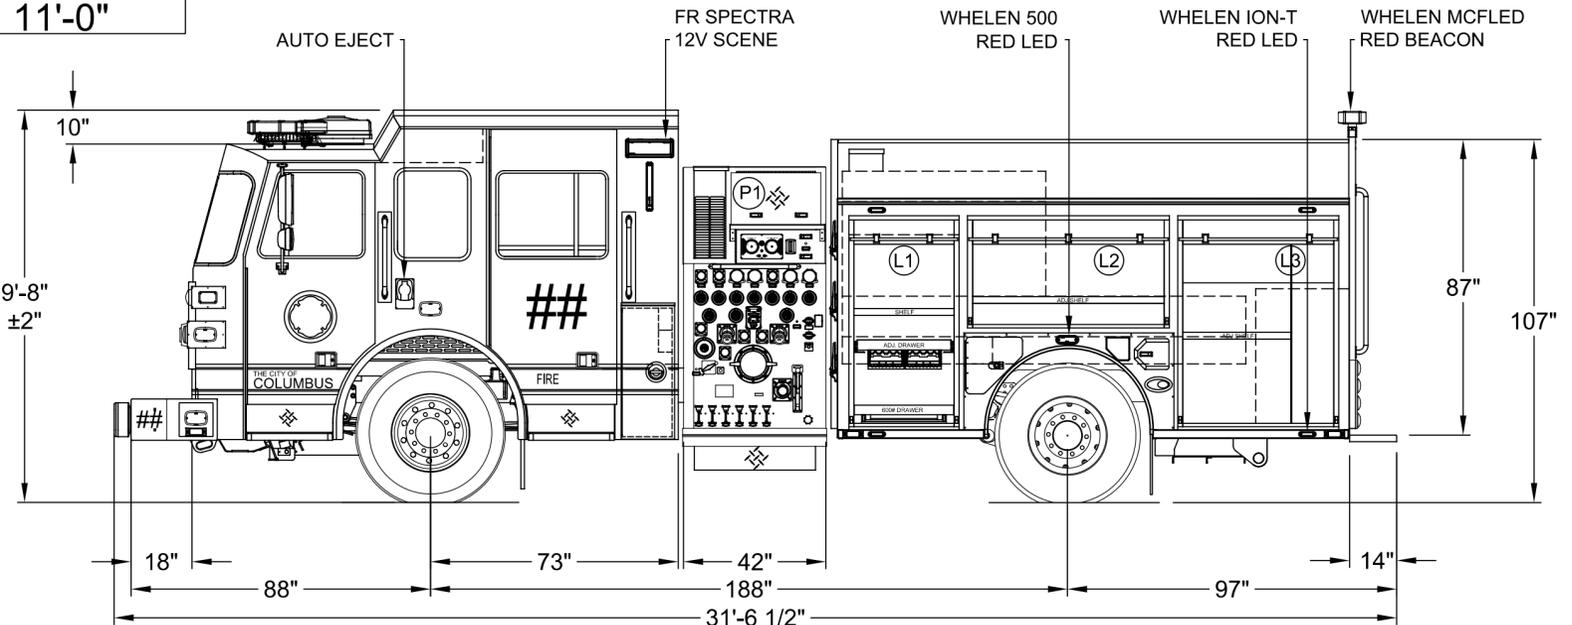

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.

IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.

DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.

CUSTOMER APPROVAL

NAME: _____

TITLE: _____

DATE: _____

REV.	DESCRIPTION	BY	DATE
L	REFERENCE SHOP ORDER REVISION EMAIL	TF	02/10/26
K	REFERENCE SHOP ORDER REVISION EMAIL	TF	02/04/26
J	REFERENCE SHOP ORDER REVISION EMAIL	TF	01/27/26
I	REFERENCE SHOP ORDER REVISION EMAIL	TF	12/11/25

DRAWN BY:
 T.FAHOUM

DATE:
 01/26/22

MFG. FACILITY:
 URBANA

CITY OF COLUMBUS DIVISION OF FIRE
 COLUMBUS, OH

CUSTOM PUMPER - PA08 BODY

DWG. NO.: HS-8096-8100