


COMP	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
L1	ROLL-UP	23.25'W x 48.50'H	29.75'W x 58.00'H x 17.75'D	18.02 CU FT
L2	ROLL-UP	53.25'W x 18.50'H	48.00'W x 28.25'H x 17.75'D	17.41 CU FT
L3	ROLL-UP	18.25'W x 48.50'H	24.75'W x 58.00'H x 17.75'D	14.89 CU FT
L4	ROLL-UP	43.25'W x 48.50'H	47.25'W x 38.00'H x 17.75'D	28.83 CU FT
A1	ROLL-UP	44.50'W x 20.50'H	53.00'W x 29.75'H x 47.75'D	43.57 CU FT
R1	ROLL-UP	23.25'W x 35.00'H	29.75'W x 48.00'H x 22.75'D	17.83 CU FT
R2	FRAMED	50.00'W x 0.25'H	80.00'W x 14.00'H x 22.75'D	11.03 CU FT
R3	ROLL-UP	18.25'W x 35.00'H	22.75'W x 48.00'H x 22.75'D	13.87 CU FT
R4	ROLL-UP	43.25'W x 35.00'H	47.25'W x 45.00'H x 22.75'D	27.99 CU FT
TOTAL VOLUME				192.75 CU FT

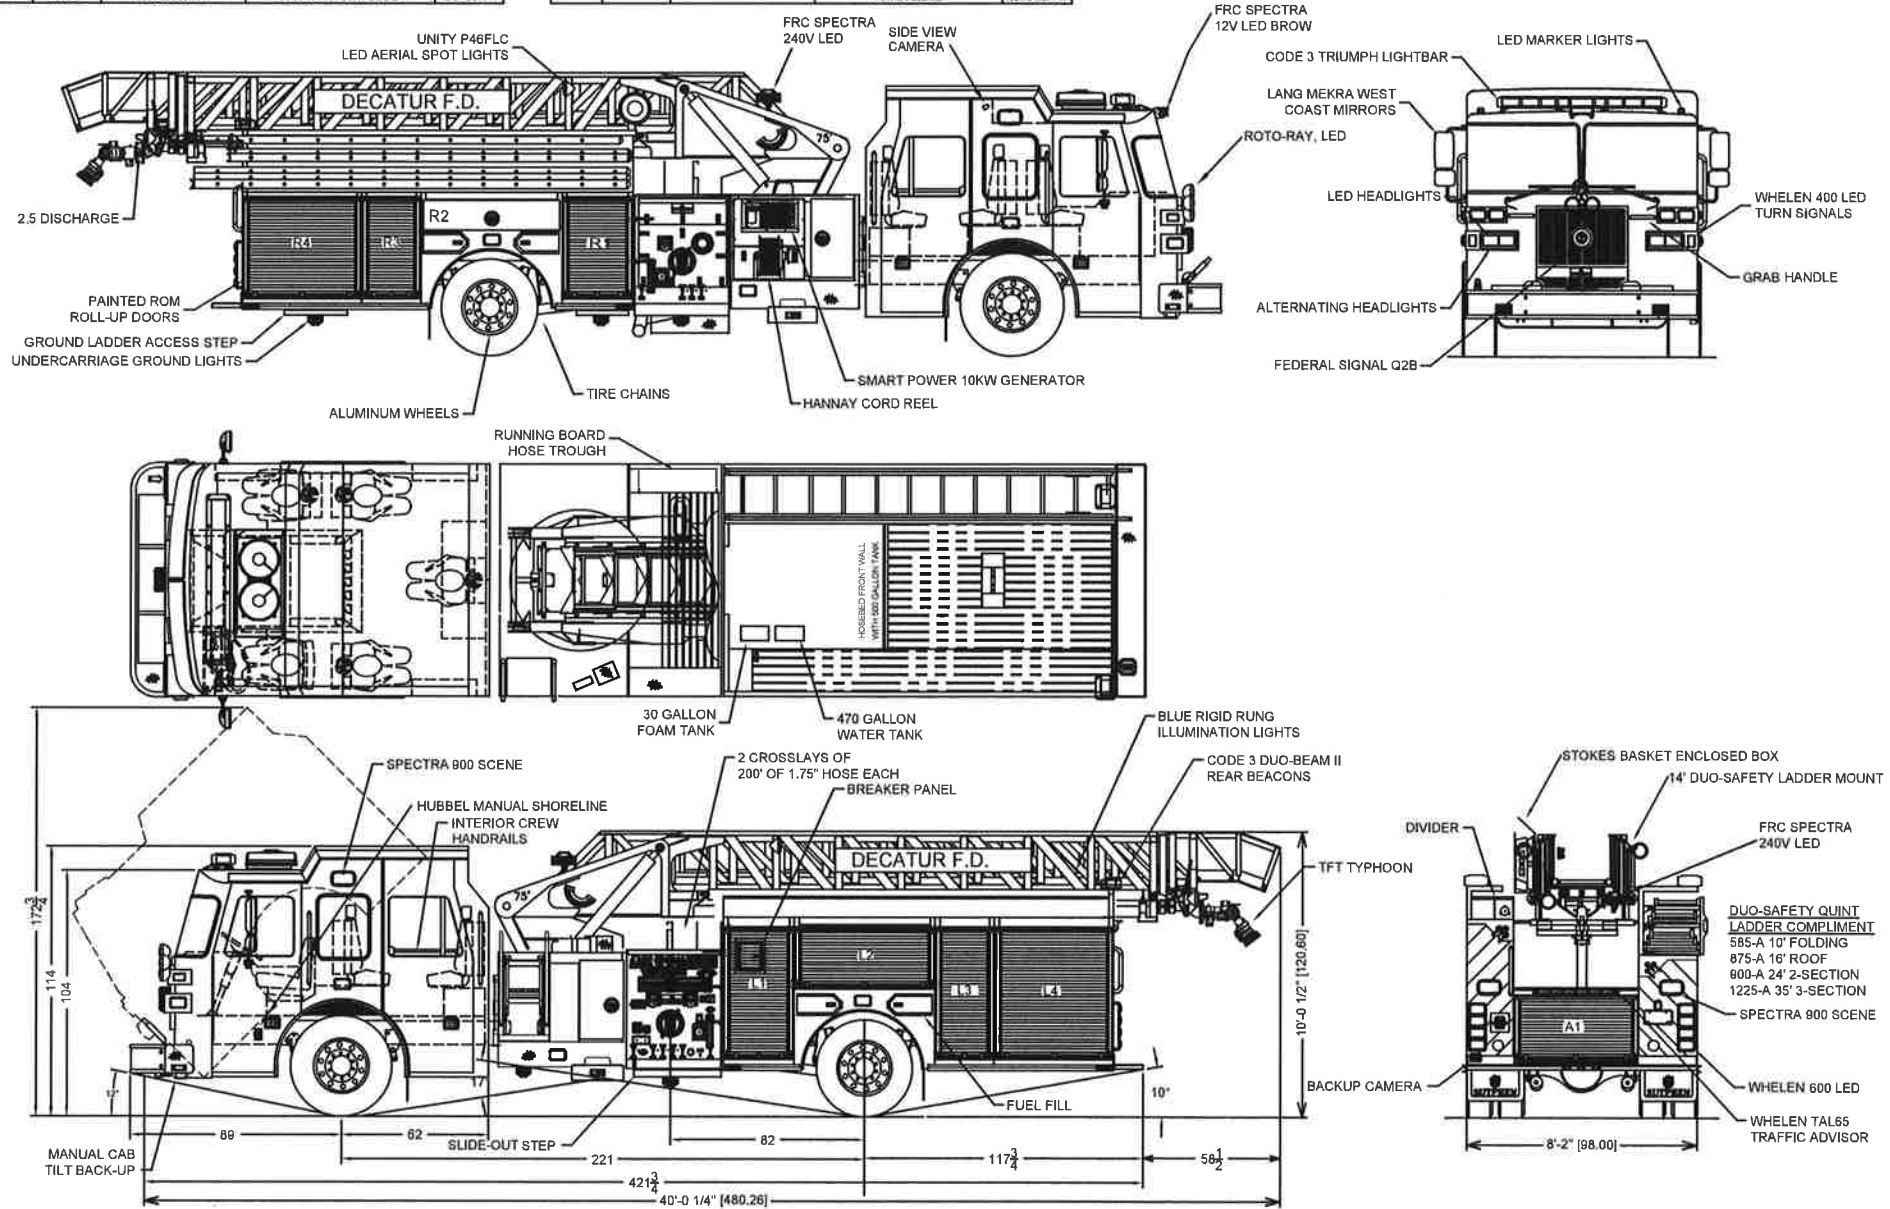

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.	CUSTOMER APPROVAL				DRAWN BY: CAM	
	NAME: _____				DATE: 12/22/2016	 SUTPHEN DECATUR FIRE DEPARTMENT DECATUR, AL S175 HS-2888
IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.	TITLE: _____	A.0 REVISION FOLLOWING PRE-CONSTRUCTION MEETING	CAM	1/13/2017	MFG. FACILITY: HILLIARD	
DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.	DATE: _____	0.0 INITIAL RELEASE	CAM	12/22/2016	DATE: HILLIARD	
THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.						SIGNAL NO. _____