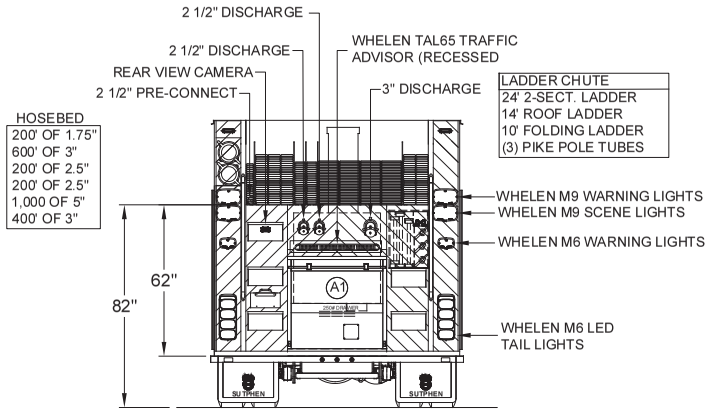

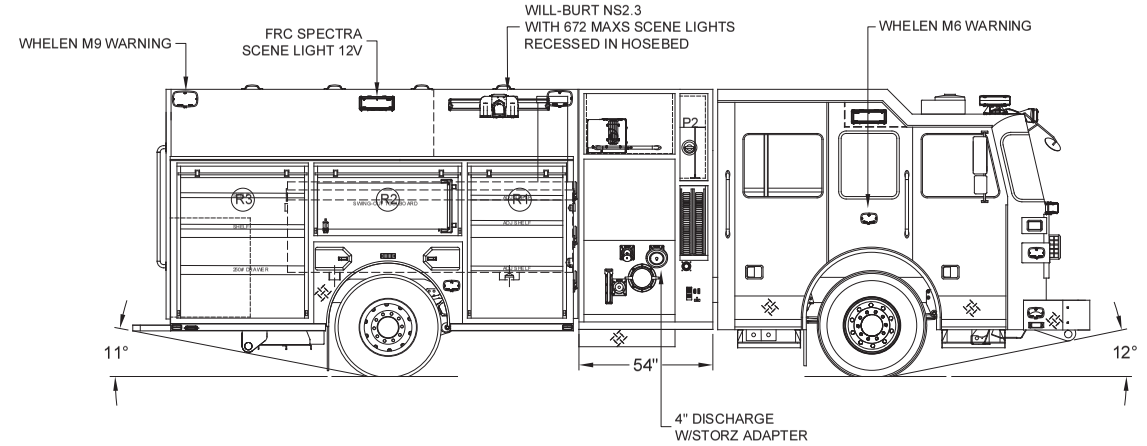

LEFT SIDE COMPARTMENTS					
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME	
L1	ROLL-UP	33.5"w X 57.4"h	43.1"w X 66"h X 27.3"d	40.8 CU. FT.	(10"h X 10.5"d UPPER)
L2	ROLL-UP	53.5"w X 28.2"h	61.6"w X 36.8"h X 27.3"d	29.8 CU. FT.	(10"h X 10.5"d UPPER)
L3	ROLL-UP	46.5"w X 57.4"h	53.4"w X 66"h X 27.3"d	50.5 CU. FT.	(10"h X 10.5"d UPPER)

RIGHT SIDE COMPARTMENTS					
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME	
R1	ROLL-UP	33.5"w X 57.4"h	43.1"w X 66"h X 27.3"d	31.1 CU. FT.	(33"h X 10.5"d UPPER)
R2	ROLL-UP	53.5"w X 23.8"h	61.6"w X 32.4"h X 10.5"d	12.2 CU. FT.	
R3	ROLL-UP	46.5"w X 57.4"h	53.4"w X 66"h X 27.3"d	38.6 CU. FT.	(33"h X 10.5"d UPPER)

REAR STEP COMPARTMENT				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
A1	ROLL-UP	37.5"w X 32.8"h	40"h X 40"w X 31"d	28.7 CU. FT.
			TOTAL:	233.3 CU.FT.

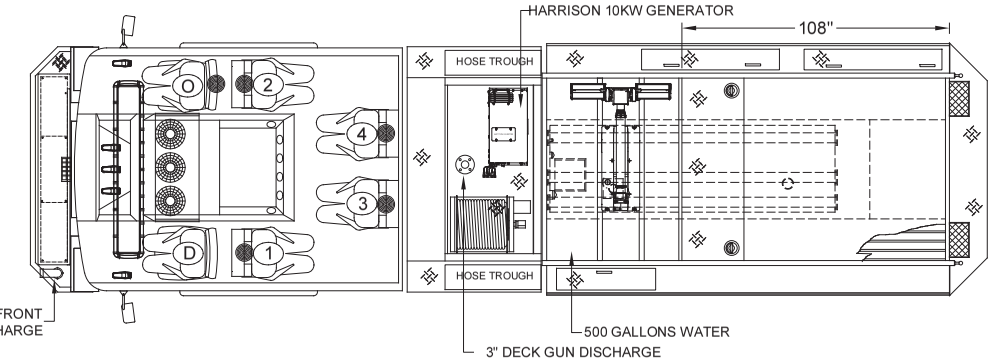

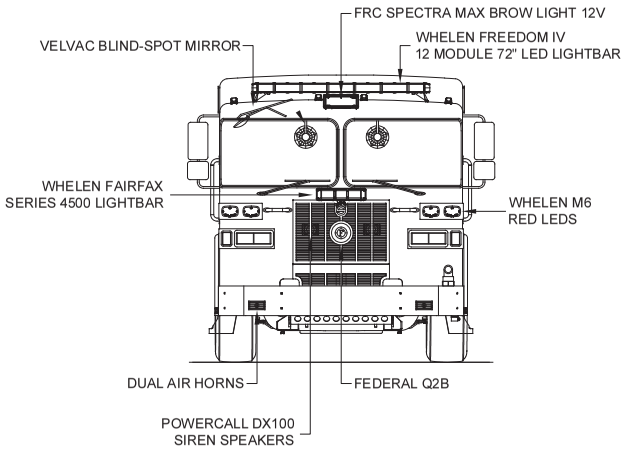

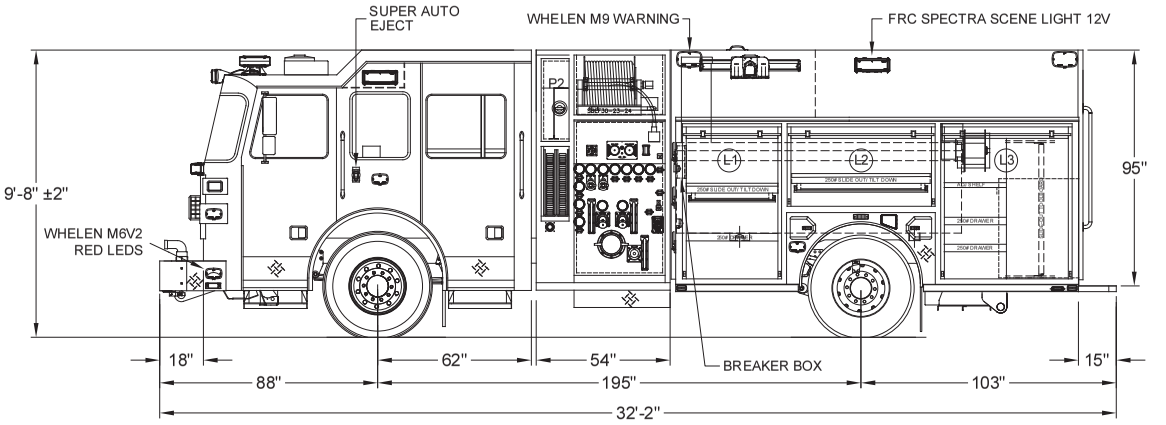

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.

IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.

DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.

CUSTOMER APPROVAL

NAME:

TITLE:

DATE:

REV.	DESCRIPTION	BY	DATE
K	MID-INSPECTION UPDATES	RM	02/20/19
J	BOOSTER HOSE ROLLERS CORRECTED ON DWG ; EXHAUST ADAPTER DELETED	RM	02/07/19
I	COLOR CODING CHANGED (FINALIZED) ; LADDER CHUTE SPECIFICATION MADE	RM	01/21/19
H	REAR BODY CHEVRONS CHANGED TO #L2 FLUORESCENT LIME TO MATCH APPPROVAL SHEET	RM	01/11/19

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.

DRAWN BY: J.MORGAN

DATE: 05/24/18

MFG. FACILITY: DUBLIN

SUTPHEN

CITY OF HARRISONBURG FIRE DEPARTMENT
HARRISONBURG, VA

CUSTOM PUMPER - PA-12 BODY

DWG. NO.: HS-6234