


LEFT SIDE COMPARTMENTS		
COMP	DOORS	VOLUME
L1	ROLL-UP	42.2 CU. FT.
L2	ROLL-UP	16.0 CU. FT.
L3	ROLL-UP	35.5 CU. FT.

RIGHT SIDE COMPARTMENTS		
COMP	DOORS	VOLUME
R1	ROLL-UP	32.3 CU. FT.
R2	ROLL-UP	27.4 CU. FT.

REAR STEP COMPARTMENT		
COMP	DOORS	VOLUME
A1	ROLL-UP	19.4 CU. FT.
		<b>TOTAL: 173.1 CU.FT.</b>

**\*\*ATTENTION\*\***  
**96" MAXIMUM HEIGHT REQUIREMENT**

**TWO-TONE CAB PAINT**  
**PAINT BREAK OPTION #4**  
**WHITE OVER RED**

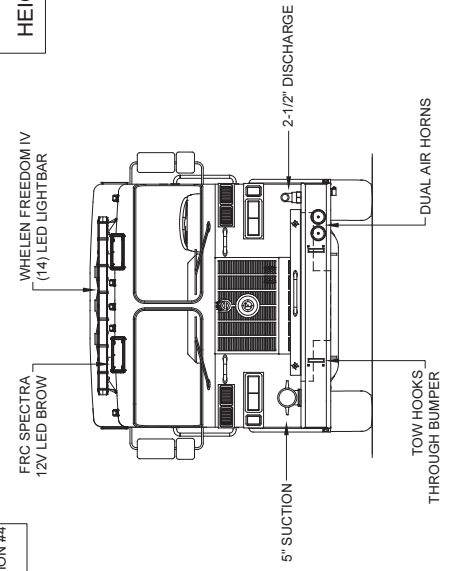

**SUTPHEN**  
 HALFMOON FIRE DEPARTMENT  
 WATERFORD, NEW YORK  
 CUSTOM PUMPER - MODIFIED PA11 BODY  
 DWG. NO. HS-8259

DRAWN BY:	R. MILLER
DATE:	06/11/18
MFG. FACILITY:	DUBLIN

---

REV	DESCRIPTION	BY	DATE
H	POST-PRODUCTION REVISION TO REFLECT FINAL PRODUCT	RM	05/03/19
G	AIR OUTLET ON SIDE OF CAB REPLACED WITH AIR INLET	RM	01/31/19
F	A1 REEL MODEL CHANGED TO FIT ON BACK WALL BEHIND ROLL-UP DOOR DRUM	RM	01/23/19
E	"CLASS A" FOAM FOR FOAM GAUGE. UPDATED DIMS OF EXT CAB COMPTS PER ENGINEERING	RM	01/03/19

---

**CUSTOMER APPROVAL**

NAME: \_\_\_\_\_

TITLE: \_\_\_\_\_

DATE: \_\_\_\_\_

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION. IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL. DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.