


- LADDER CHUTE
- (1) 24' 2-SECT.
  - (1) 14' ROOF
  - (1) 10' FOLDING
  - (3) PIKE POLE TUBES
  - (1) BACK BOARD STORAGE

COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
L1	ROLL-UP	35.5"W X 58.2"H	43.1"W X 66"H X 27.3"D	40.8 CU. FT.
L2	ROLL-UP	55.5"W X 29.0"H	61.6"W X 36.8"H X 27.3"D	29.8 CU. FT.
L3	ROLL-UP	48.5"W X 58.2"H	58.4"W X 66"H X 27.3"D	50.5 CU. FT.

COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
R1	ROLL-UP	35.5"W X 58.2"H	43.1"W X 66"H X 27.3"D	31.1 CU. FT.
R2	ROLL-UP	55.5"W X 29.0"H	61.6"W X 36.8"H X 10.5"D	13.8 CU. FT.
R3	ROLL-UP	48.5"W X 58.2"H	58.4"W X 66"H X 27.3"D	39.6 CU. FT.

COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
A1	ROLL-UP	37.5"W X 40"H	49"H X 40"W X 37"D	28.7 CU. FT.
				TOTAL: 233.3 CU. FT.

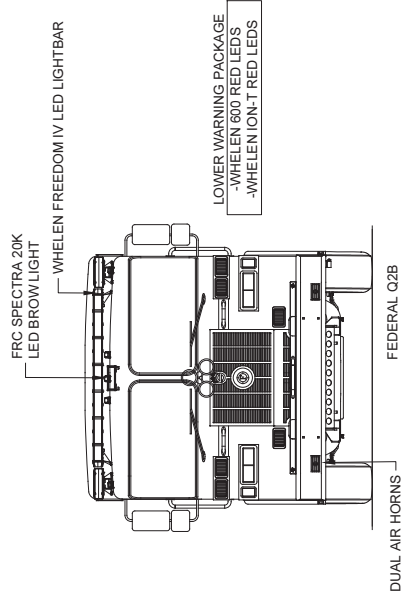

**SUTPHEN**  
FLORENCE FIRE & RESCUE  
FLORENCE, AL

CUSTOM PUMPER - PA-12 BODY  
HS-6320

DATE: 8/28/19  
DRAWN BY: MCLARK

DATE: 4/26/19  
M/C: M/C

DATE: 11/19/18  
M/C: M/C

DATE: 8/6/18  
M/C: M/C

DATE: \_\_\_\_\_  
BY: \_\_\_\_\_

DATE: \_\_\_\_\_  
MFG. FACILITY: DUBLIN

DESCRIPTION: \_\_\_\_\_

COMPONENT REPORT UPDATE

CHANGED USABLE HOSEBED LENGTH TO MATCH ENGINEERING DRAWING

A1 COMPARTMENT DIMENSION / ADD HOSEBED BULKHEAD AND DEFLECTOR / COMPONENT REPORT REVISIONS

AFTER-PRECON

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.

CUSTOMER APPROVAL

NAME: \_\_\_\_\_

TITLE: \_\_\_\_\_

DATE: \_\_\_\_\_

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.

IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.

DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.