


Left Side Compartmentation				
Compt	Doors	Opening Dimensions	Inside Dimensions	Volume
L1	Roll Up	23x56	40x72x26.25	43.8 CU FT
L2	Roll Up	57x22	64x38x26.25	36.9 CU FT
L3	Roll Up	46x56	53x72x26.25	50.0 CU FT
Right Side Compartmentation				
Compt	Doors	Opening Dimensions	Inside Dimensions	Volume
R1	Roll Up	23x50	40x60x10.25/26.25	26.8 CU FT
R2	Roll Up	57x16	64x26x10.25	9.9 CU FT
R3	Roll Up	46x50	53x60x10.25/26.25	35.5 CU FT
Rear Compartmentation				
Compt	Doors	Opening Dimensions	Inside Dimensions	Volume
A1	Roll Up	37x20	42x32x28.25	22 CU FT
Coffin Compartmentation				
Compt	Doors	Opening Dimensions	Inside Dimensions	Volume
LH	Hinge	68x20	137x21x28	46.6 CU FT
HALE QMAX-XS 1750 SINGLE STAGE PUMP 1000 GALLONS OF WATER				Total Volume
				271.5 CU Ft

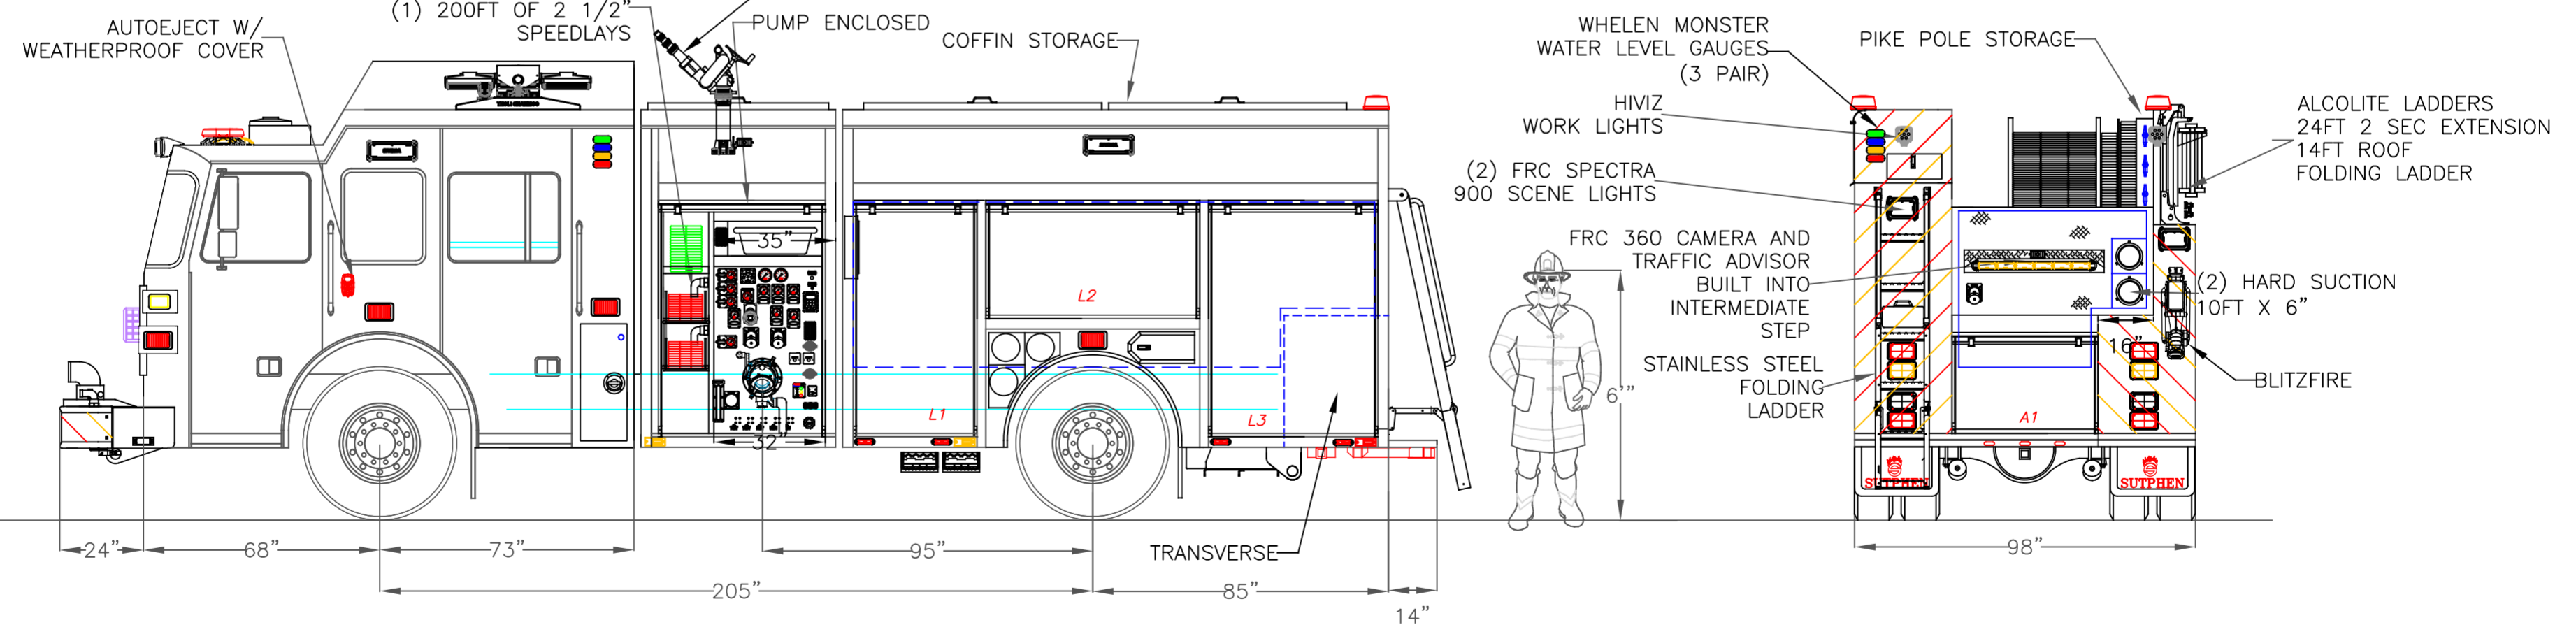

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.	CUSTOMER APPROVAL				DRAWN BY: S.DORFMAN	
	NAME:	C	CHANGE ORDER C	SED	11/19/19	DATE: 07/27/2018
IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.	TITLE:	B	PRE-CON AND CORD REEL LOCATION	SED	3/8/19	MFG. FACILITY: SUTPHEN EAST LAKE ARIEL, PA
DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.	DATE:	REV.	DESCRIPTION	BY	DATE	DWG. NO.: HS 6466 PRODUCTION DRAWING
THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.						

TAFTON FIRE CO.  
TAFTON, PA

CUSTOM ALUMINUM PUMPER RESCUE  
HS 6466 PRODUCTION DRAWING