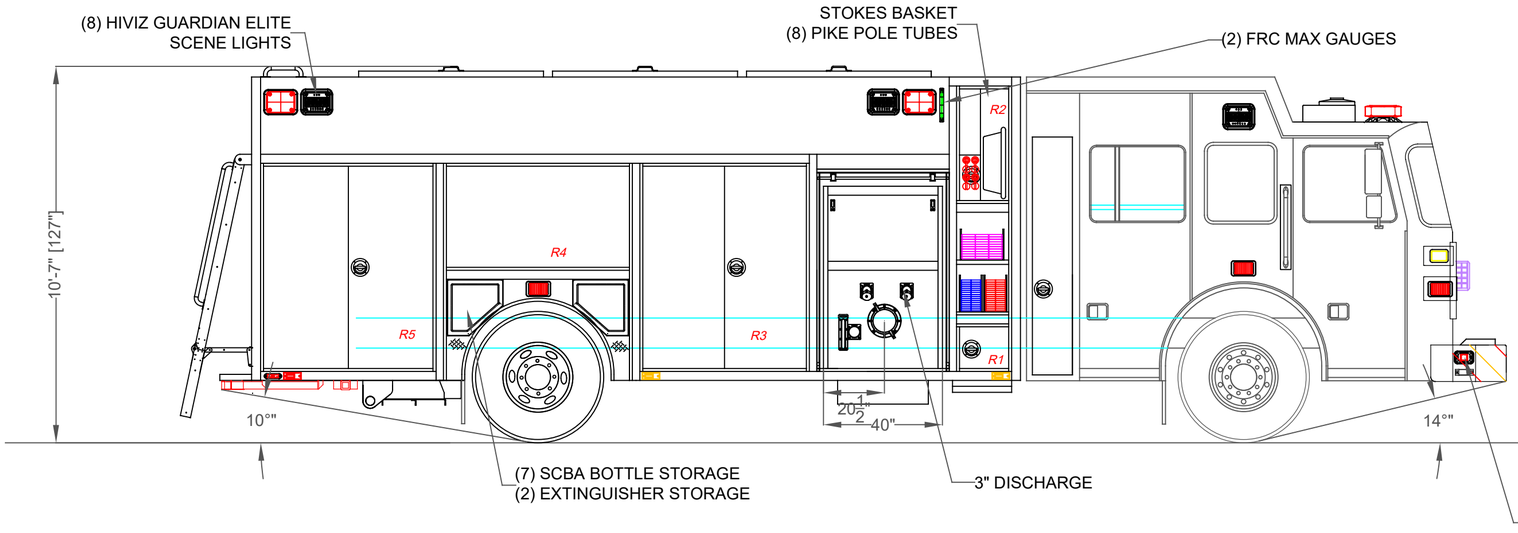

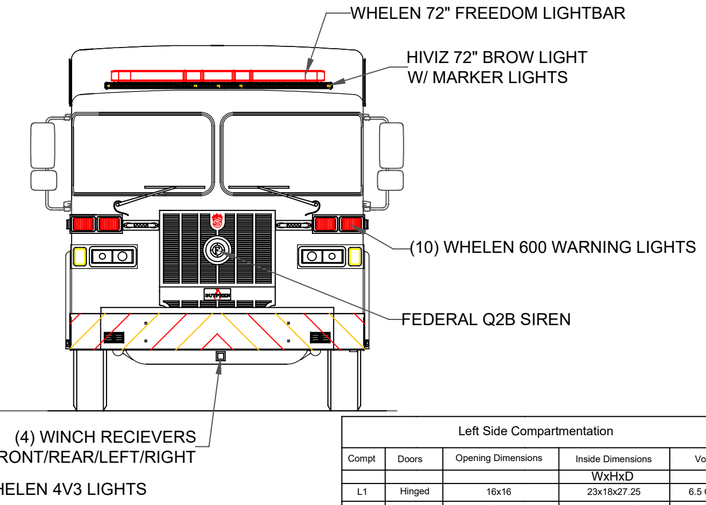

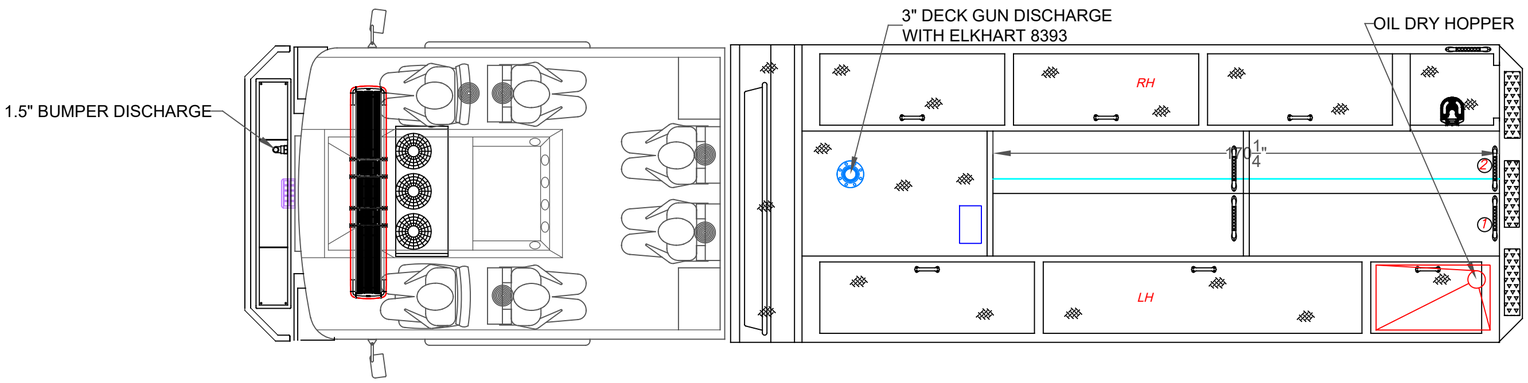

Hose Load
1:1000ft of 5"
2:300ft of 3" Pre-Connected

Left Side Compartmentation				
Compt	Doors	Opening Dimensions	Inside Dimensions	Volume
			WxHxD	
L1	Hinged	16x16	23x18x27.25	6.5 CU FT
L2	Hinged	16x35	23x41.5x48	26.2 CU FT
L3	Hinged	52x68	59.5x72x27.25	67.6 CU FT
L4	Hinged	60x32	66.25x38x27.25	39.7 CU FT
L5	Hinged	56x68	63x72x27.25	71.5 CU FT
Right Side Compartmentation				
Compt	Doors	Opening Dimensions	Inside Dimensions	Volume
R1	Hinged	16x16	23x18x27.25	6.5 CU FT
R2	Hinged	16x35	23x41.5x48	26.2 CU FT
R3	Hinged	52x68	59.5x72x27.25	67.6 CU FT
R4	Hinged	60x32	66.25x38x27.25	39.7 CU FT
R5	Hinged	56x68	63x72x27.25	71.5 CU FT
Rear Compartmentation				
Compt	Doors	Opening Dimensions	Inside Dimensions	Volume
A1	Hinged	35x53	42x63x31	47.5 CU FT
Coffin Compartmentation				
Compt	Doors	Opening Dimensions	Inside Dimensions	Volume
			LxHxW	
LH	Hatch	(3) 72.125x24	234.5x26x26	91.7 CU FT
RH	Hatch	(3) 62.125x24	204.5x26x26	80.0 CU FT

Total Volume
642.2 CU Ft

Waterous CSU-2000 Pump
Water Tank Capacity 1000 gal

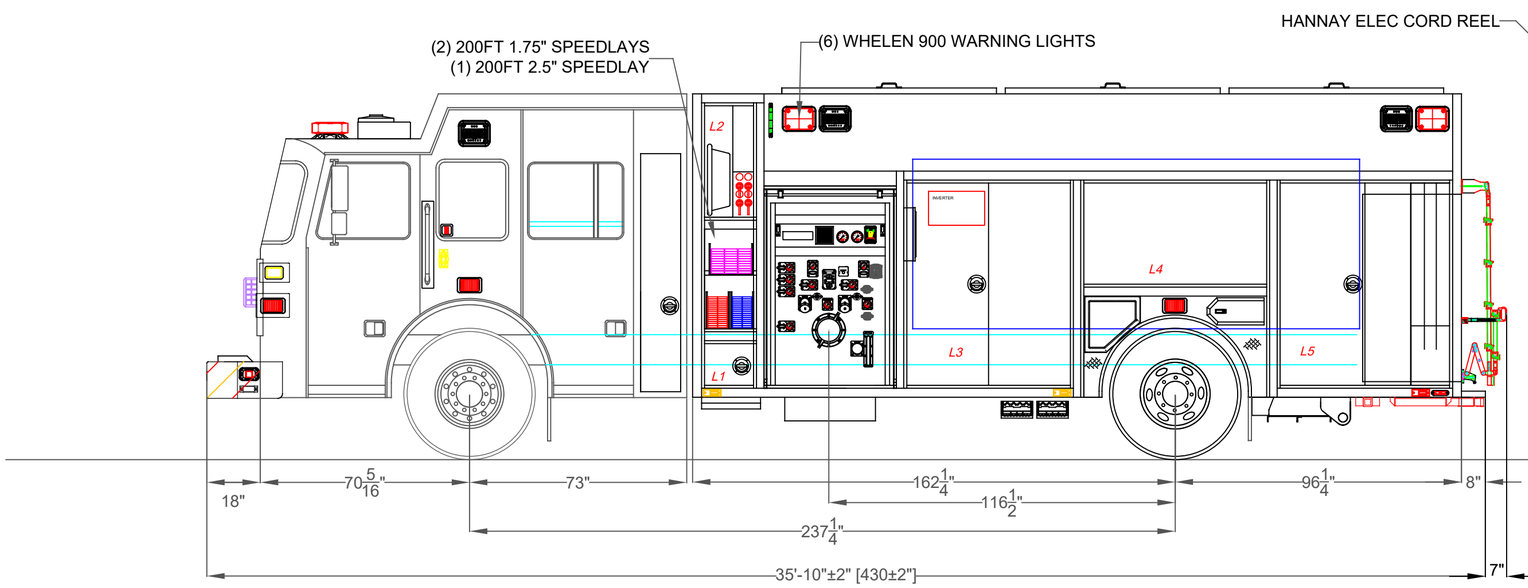

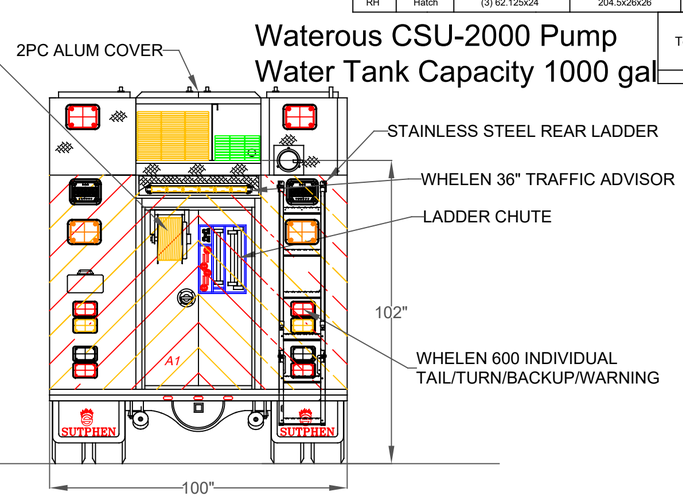

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.

IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.

DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.

CUSTOMER APPROVAL

NAME:

TITLE:

DATE:

REV.	DESCRIPTION	BY	DATE

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.

DRAWN BY: J. GORDON

DATE: 08/12/2019

MFG. FACILITY: SUTPHEN EAST LAKE ARIEL,PA

SUTPHEN EAST
55 INNOVATION DRIVE
LAKE ARIEL, PA
1-844-776-2889

IMPERIAL VOLUNTEER FIRE DEPT.
IMPERIAL, PA

CUSTOM ALUMINUM RESCUE PUMPER

DWG. NO.: HS 6634