
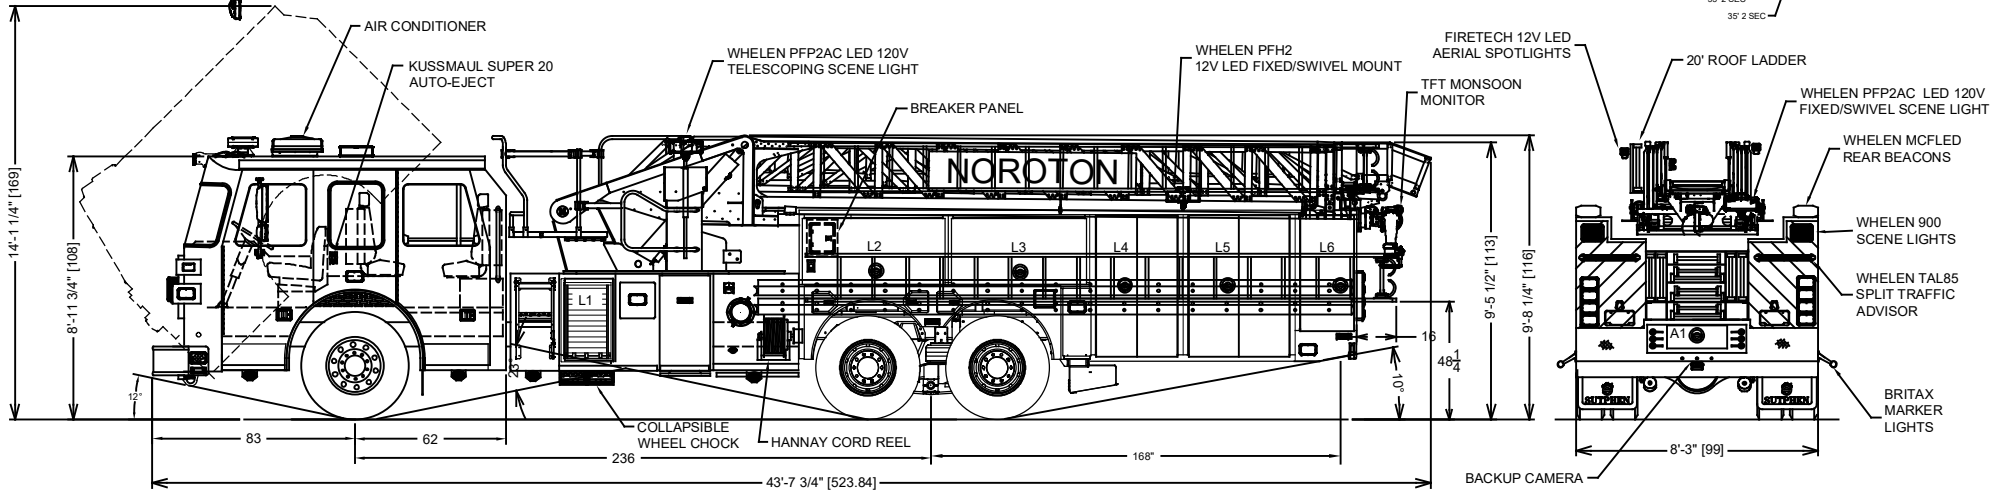
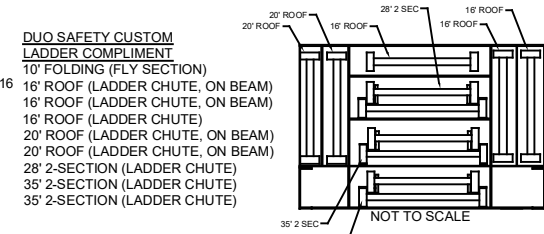
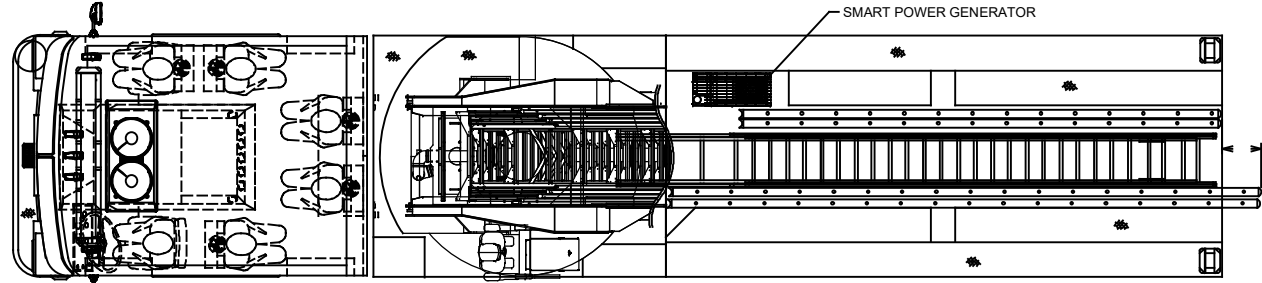


COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
L1	ROLL-UP	16.75"W x 18.75"H	23.25"W x 38.25"H x 26.50"D	13.64 CU. FT.
L2	HINGED	49.25"W x 24.00"H	58.00"W x 25.25"H x 26.50"D	22.45 CU. FT.
L3	HINGED	49.25"W x 24.00"H	58.00"W x 25.25"H x 26.50"D	22.45 CU. FT.
L4	ROLL-UP	31.25"W x 43.00"H	37.75"W x 49.50"H x 26.50"D	28.85 CU. FT.
L5	ROLL-UP	39.00"W x 43.00"H	45.50"W x 49.50"H x 26.50"D	34.53 CU. FT.
L6	ROLL-UP	39.00"W x 43.00"H	22.50"W x 39.25"H x 26.50"D	13.54 CU. FT.

COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
R1	ROLL-UP	34.25"W x 19.25"H	40.75"W x 28.75"H x 18.50"D	12.54 CU. FT.
R2	HINGED	49.25"W x 18.75"H	58.00"W x 25.25"H x 12.00"D	10.17 CU. FT.
R3	HINGED	49.25"W x 18.75"H	58.00"W x 25.25"H x 26.50"D	22.45 CU. FT.
R4	ROLL-UP	31.25"W x 43.00"H	37.75"W x 49.50"H x 26.50"D	28.85 CU. FT.
R5	ROLL-UP	39.00"W x 43.00"H	45.50"W x 49.50"H x 26.50"D	34.53 CU. FT.
R6	ROLL-UP	39.00"W x 43.00"H	22.50"W x 39.25"H x 26.50"D	13.54 CU. FT.
A1	HINGED	25.00"W x 9.50"H	25.00"W x 9.50"H x 88.00"D	15.04 CU. FT.
TOTAL VOLUME				272 CU. FT.

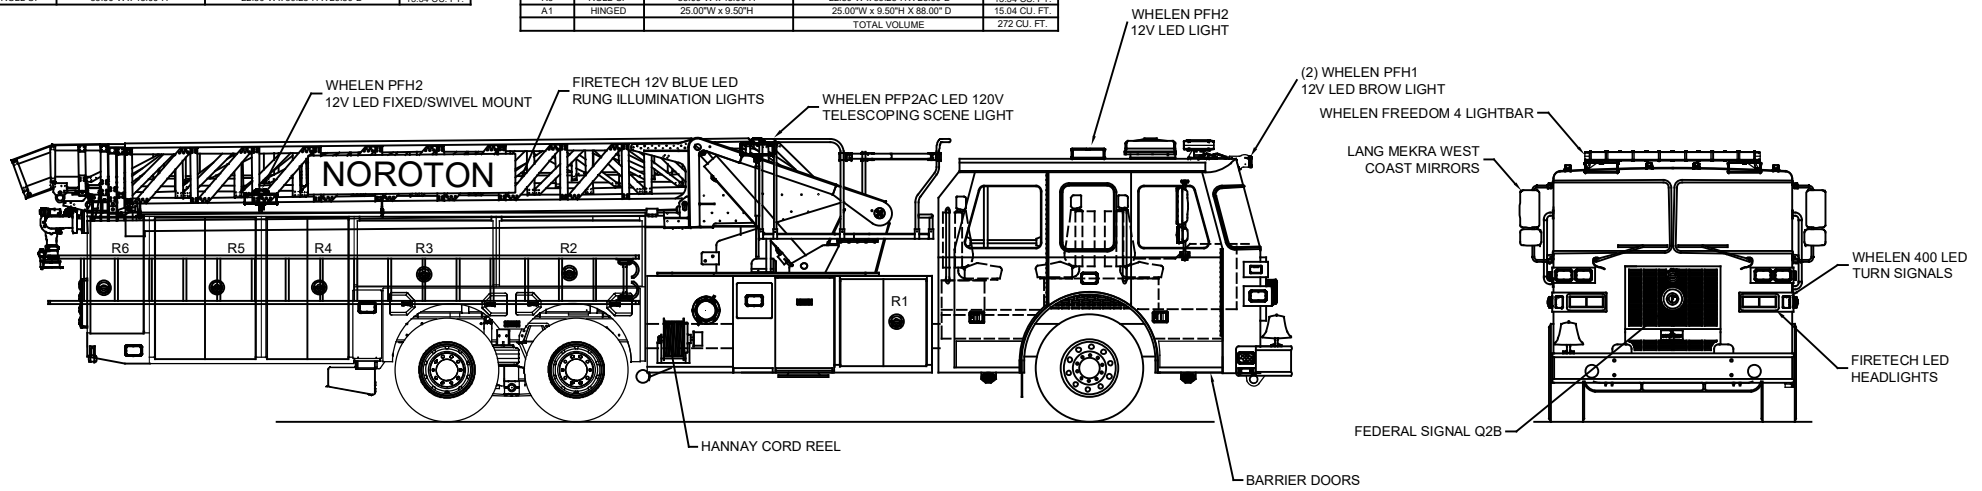

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.

IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.

DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.

CUSTOMER APPROVAL

NAME: _____

TITLE: _____

DATE: _____

REV.	DESCRIPTION	BY	DATE
C.0	LOWERED TELE LIGHTS BELOW TURNABLE HANDRAILS	CAM	1/14/2020

DRAWN BY: APF

DATE: 10/2/2018

MFG. FACILITY: HILLIARD

SUTPHEN

NOROTON FIRE DEPARTMENT
DARIEN, CT

SL100

DWG. NO.: HS-6676