


HOSEBED  
HARD SUCT HOSE COMPT  
300' OF 1.75"  
1,200' OF 5"  
SPARE ADJ. DIVIDER  
300' OF 2.5"  
BBOARD / (3) PIKE COMPT




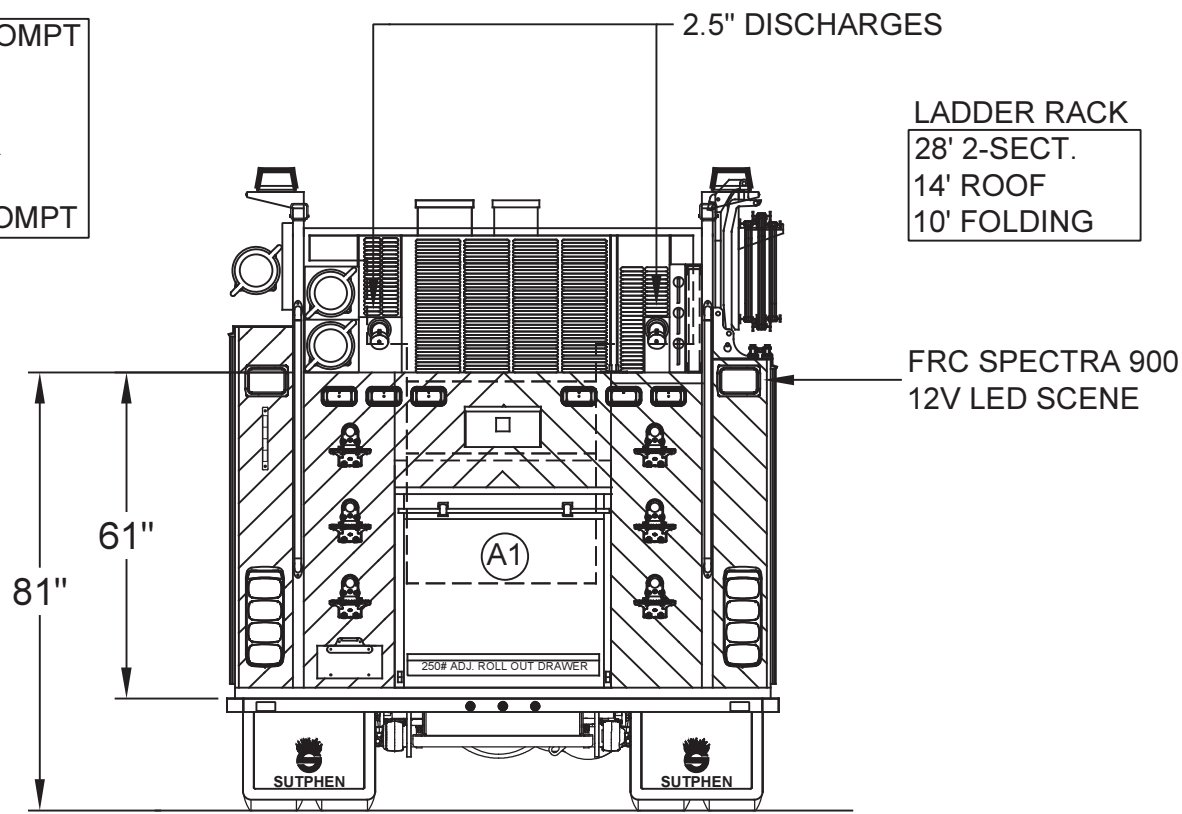


LEFT SIDE COMPARTMENTS					
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME	
L1	ROLL-UP	35.5"w X 58.2"h	43.1"w X 66"h X 27.3"d	40.8 CU. FT.	(10"h X 10.5"d UPPER)
L2	ROLL-UP	55.5"w X 29.0"h	61.6"w X 36.8"h X 27.3"d	29.8 CU. FT.	(10"h X 10.5"d UPPER)
L3	ROLL-UP	48.5"w X 58.2"h	53.4"w X 66"h X 27.3"d	50.5 CU. FT.	(10"h X 10.5"d UPPER)

RIGHT SIDE COMPARTMENTS					
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME	
R1	ROLL-UP	35.5"w X 52.2"h	43.1"w X 60"h X 27.3"d	39.2 CU. FT.	(4"h X 10.5"d UPPER)
R2	ROLL-UP	55.5"w X 23.0"h	61.6"w X 30.8"h X 27.3"d	27.6 CU. FT.	(4"h X 10.5"d UPPER)
R3	ROLL-UP	48.5"w X 52.2"h	53.4"w X 60"h X 27.3"d	48.5 CU. FT.	(4"h X 10.5"d UPPER)

REAR STEP COMPARTMENT					
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME	
A1	ROLL-UP	37"w X 32.1"h	40"h X 40"w X 31"d	28.7 CU. FT.	
TOTAL:				265.1 CU.FT.	

TWO-TONE CAB  
PAINT BREAK OPTION #3  
GRAY OVER RED

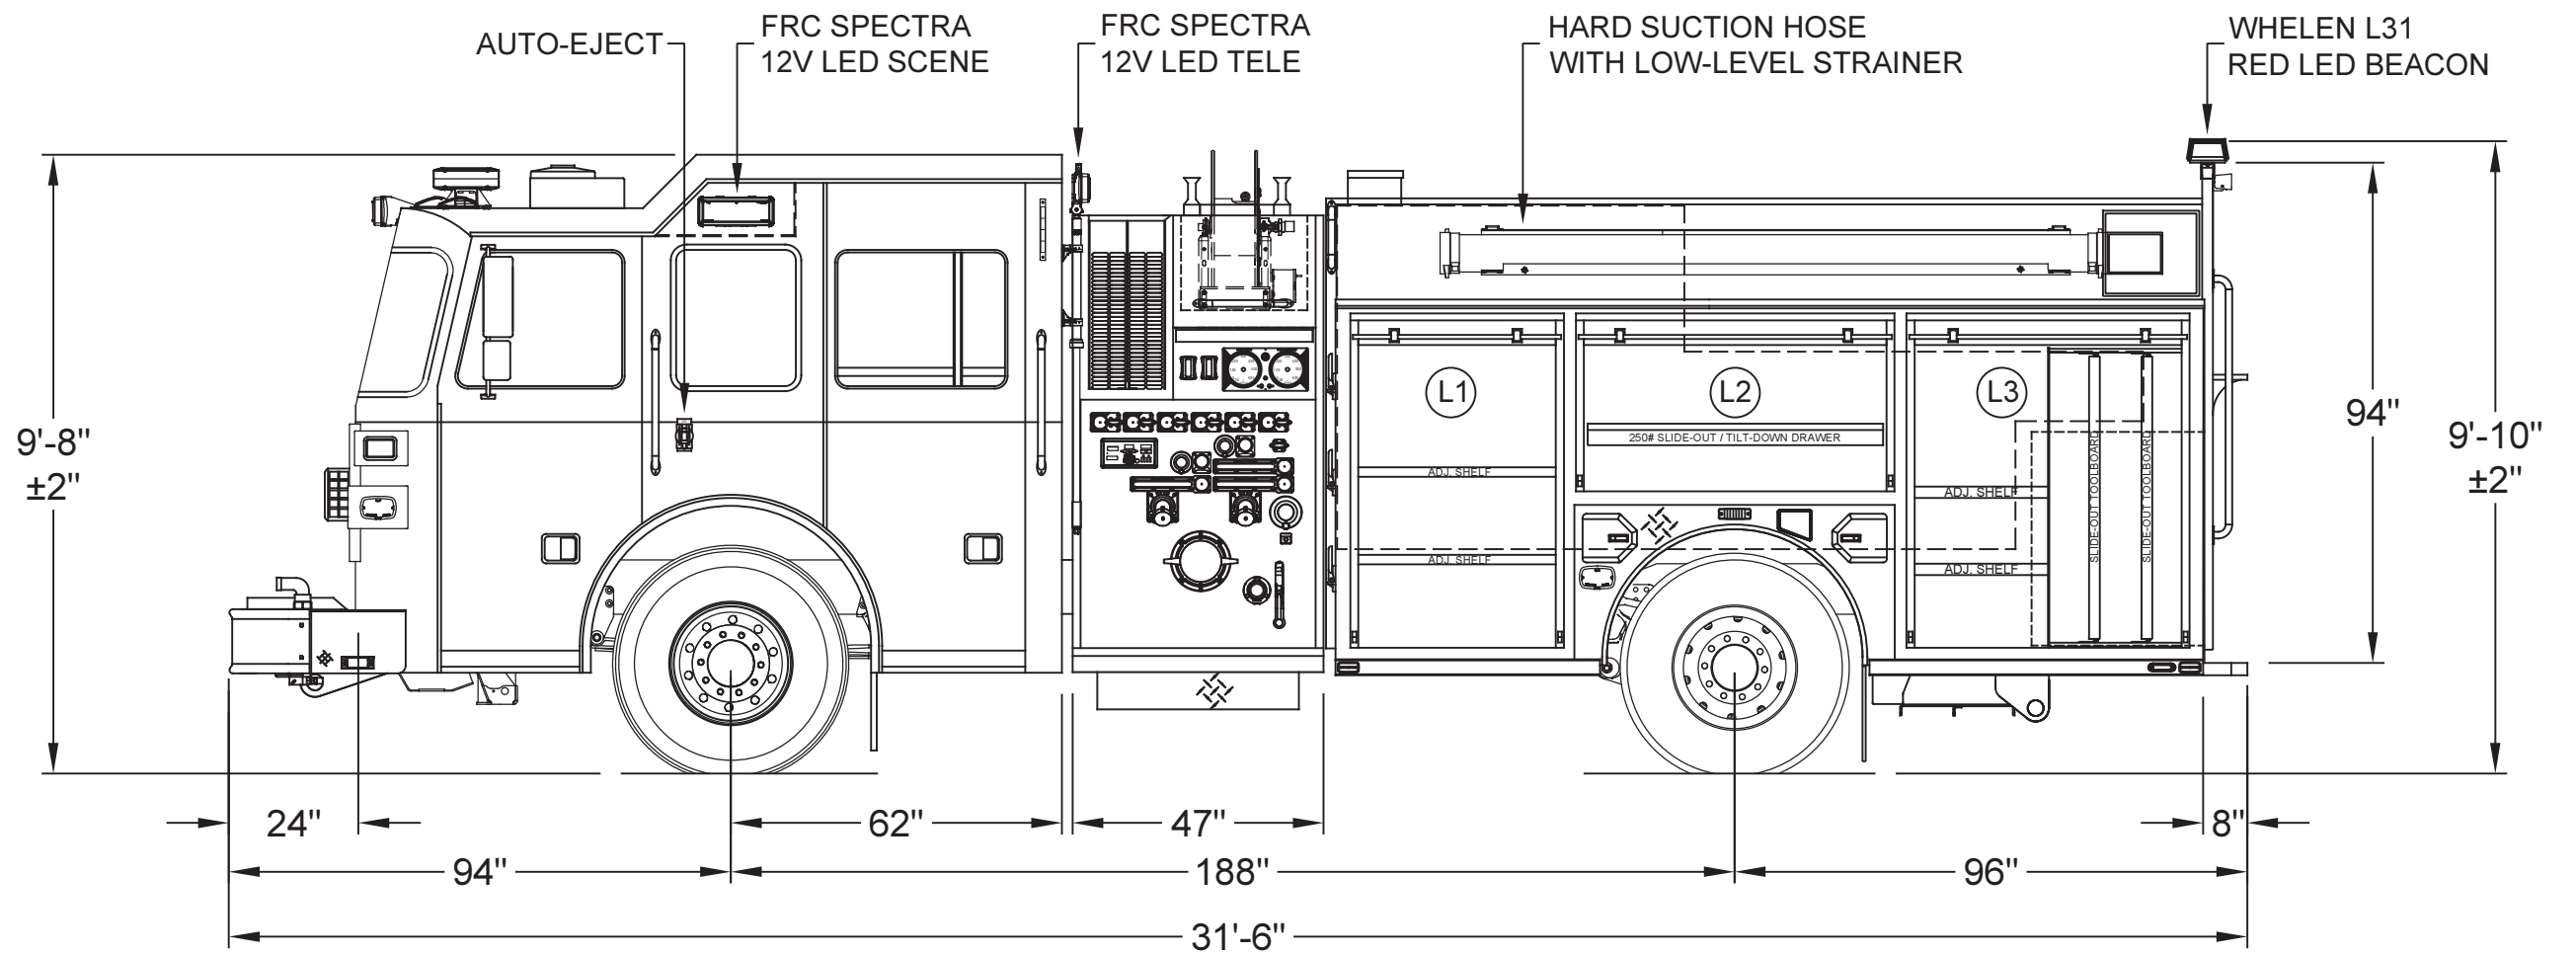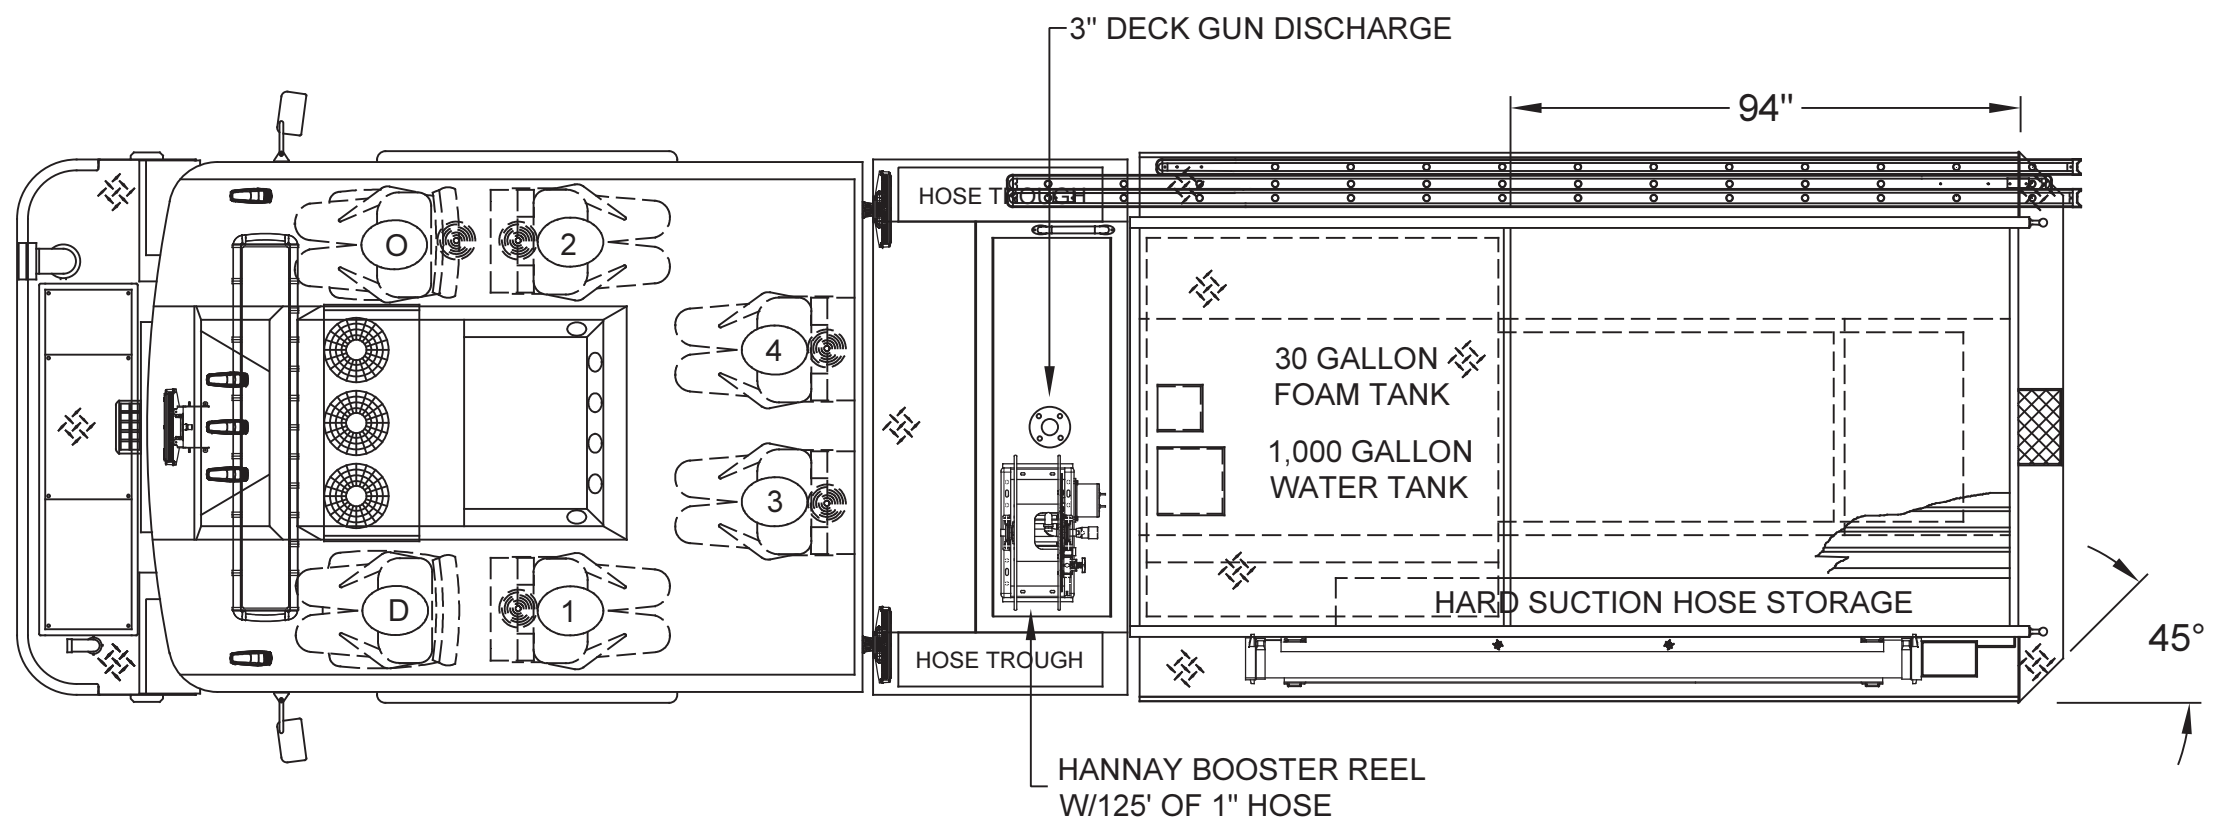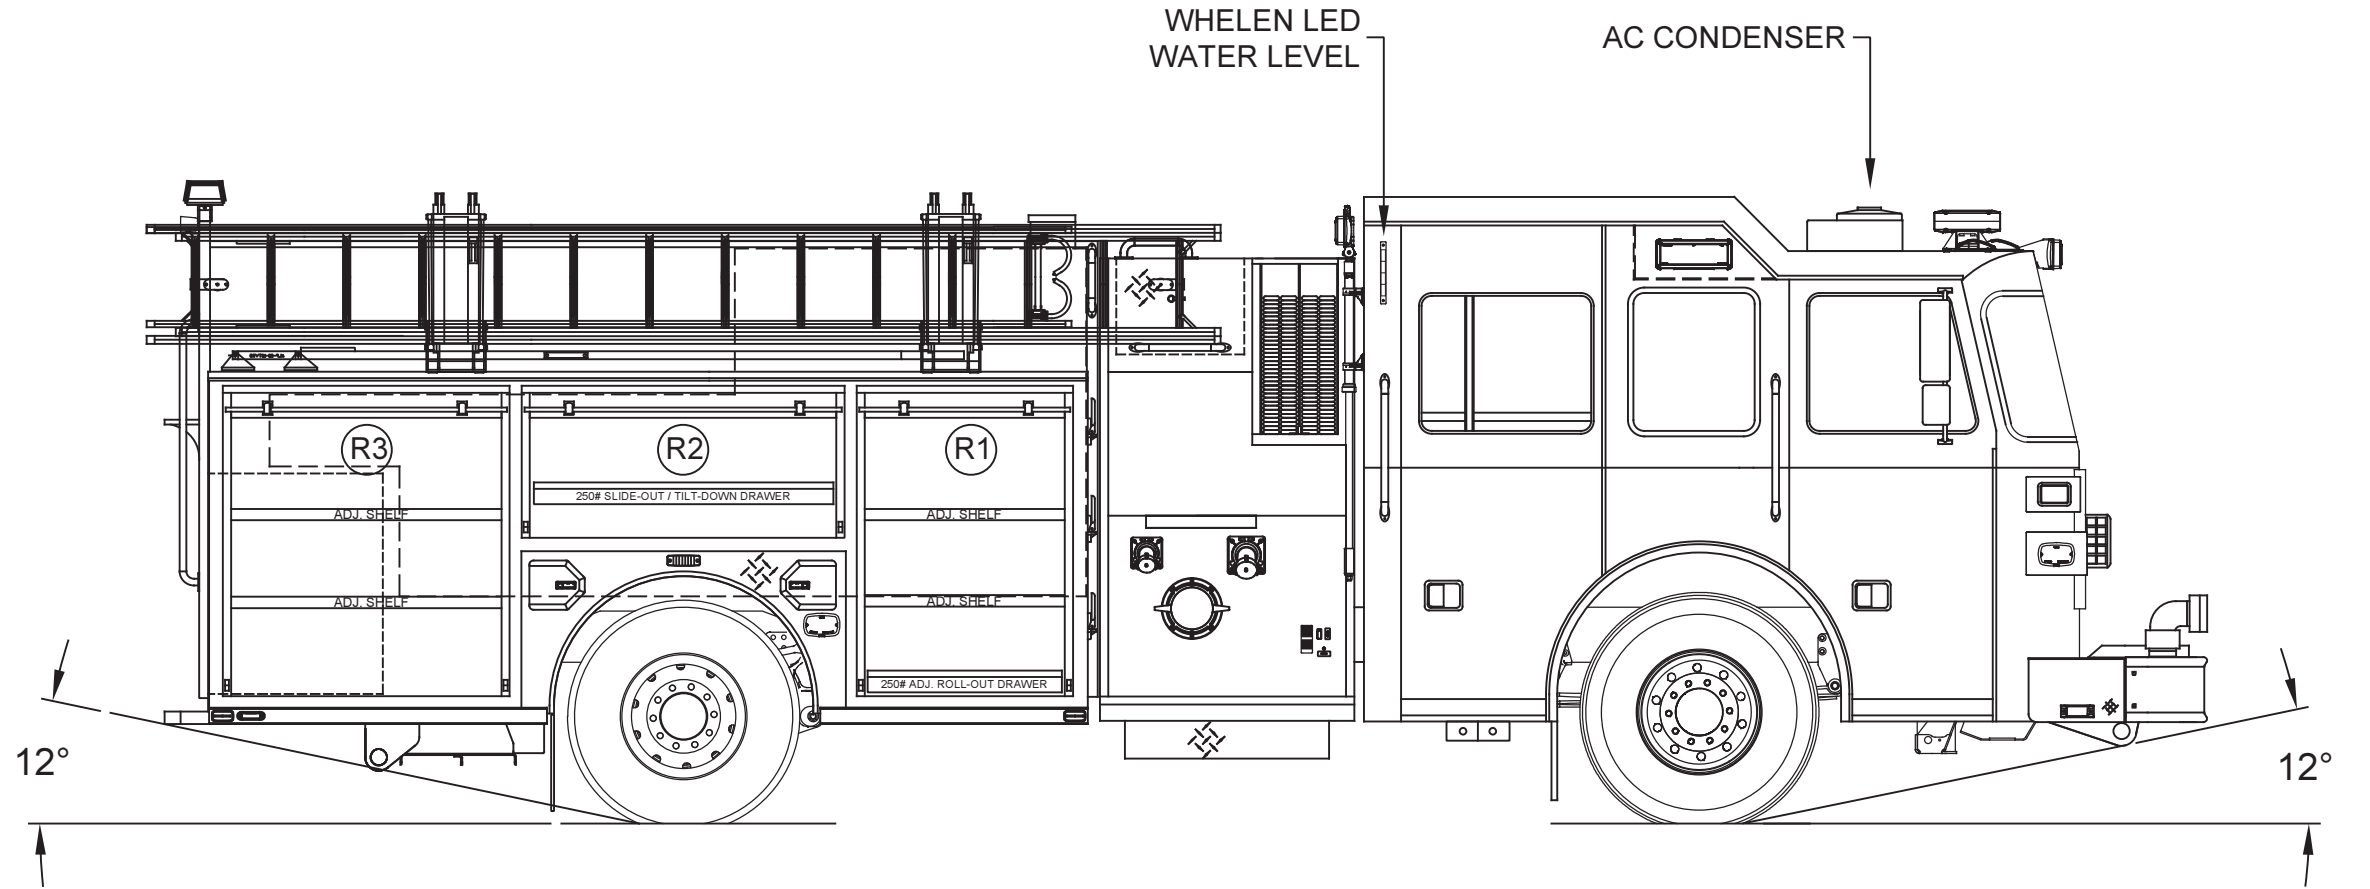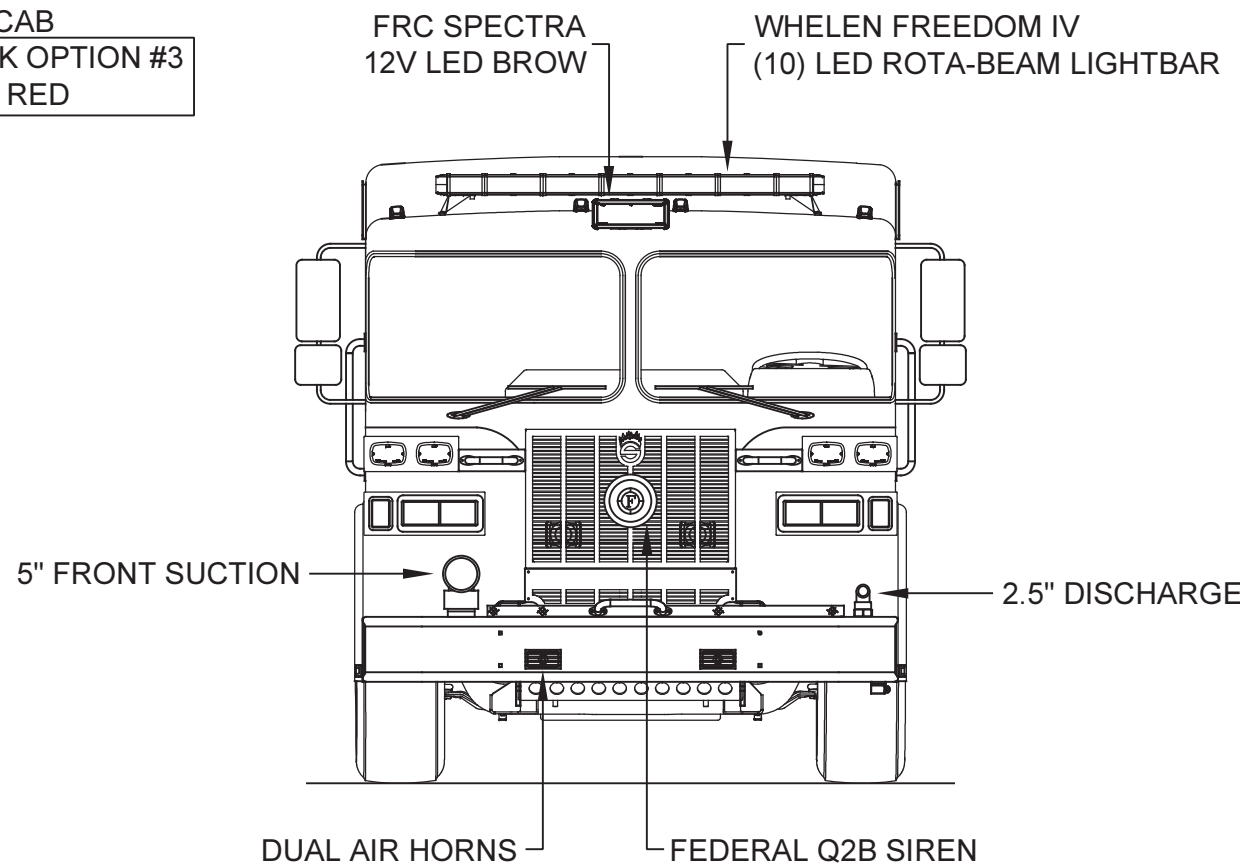

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.

#### CUSTOMER APPROVAL

NAME: \_\_\_\_\_

TITLE: \_\_\_\_\_

DATE: \_\_\_\_\_

H REAR BODY FIXED STEP ABOVE A1 CHANGED TO 8" DEEP TO NOT STICK OUT PAST TAILBOARD

RM 10/30/19

DRAWN BY:

R.MILLER

G MOVED SPECTRA900 LIGHT HEAD ON DRIVER'S SIDE REAR OF BODY DOWN TO SAME HEIGHT AS OFFICER'S SIDE

RM 10/21/19

DATE:

10/11/18

F MINOR CLARIFICATIONS

RM 09/09/19

MFG. FACILITY:

DUBLIN

E SEVERAL UPDATES - SEE SO CHANGE SUMMARY ON SHARED OR COMPONENT REPORT ATTACHED

RM 08/13/19

REV. DESCRIPTION

BY DATE

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.

**SUTPHEN**

POWHATAN COUNTY FIRE RESCUE  
POWHATAN, VA

CUSTOM PUMPER - PA-12 BODY

DWG. NO.:

HS-6363