COMPT.	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
L1	ROLL-UP	23.25"W x 35.00"H	29.75"W x 45.00"H x 22.75"D	
L2	HINGED	50.00"W x 9.25"H	60.00"W x 14.00"H x 22.75"D	11.65 CU. FT.
L3	ROLL-UP	43.25"W x 35.00"H	49.75"W X 45.00"H x 22.75"D	29.47 CU. FT.
L4	ROLL-UP	16.25"W x 35.00"H	22.25"W X 45.00"H x 22.75"D	13.18 CU. FT.
A1	ROLL-UP	44.50"W x 29.50"H	53.00"W x 29.75"H X 47.75"D	43.57 CU. FT.

COMPT.	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
R1	ROLL-UP	23.25"W x 49.50"H	29.75"W x 59.00"H x 17.75"D	18.80 CU. FT.
R2	ROLL-UP	53.25"W x 19.50"H	60.00"W x 28.25"H x 17.75"D	17.41 CU. FT.
R3	ROLL-UP	43.25"W x 49.50"H	49.75"W x 59.00"H x 17.75"D	30.15 CU. FT.
R4	ROLL-UP	16.25"W x 49.50"H	22.25"W x 59.00"H x 17.75"D	13.48 CU. FT.
			TOTAL VOLUME	100.35 CU. FT.

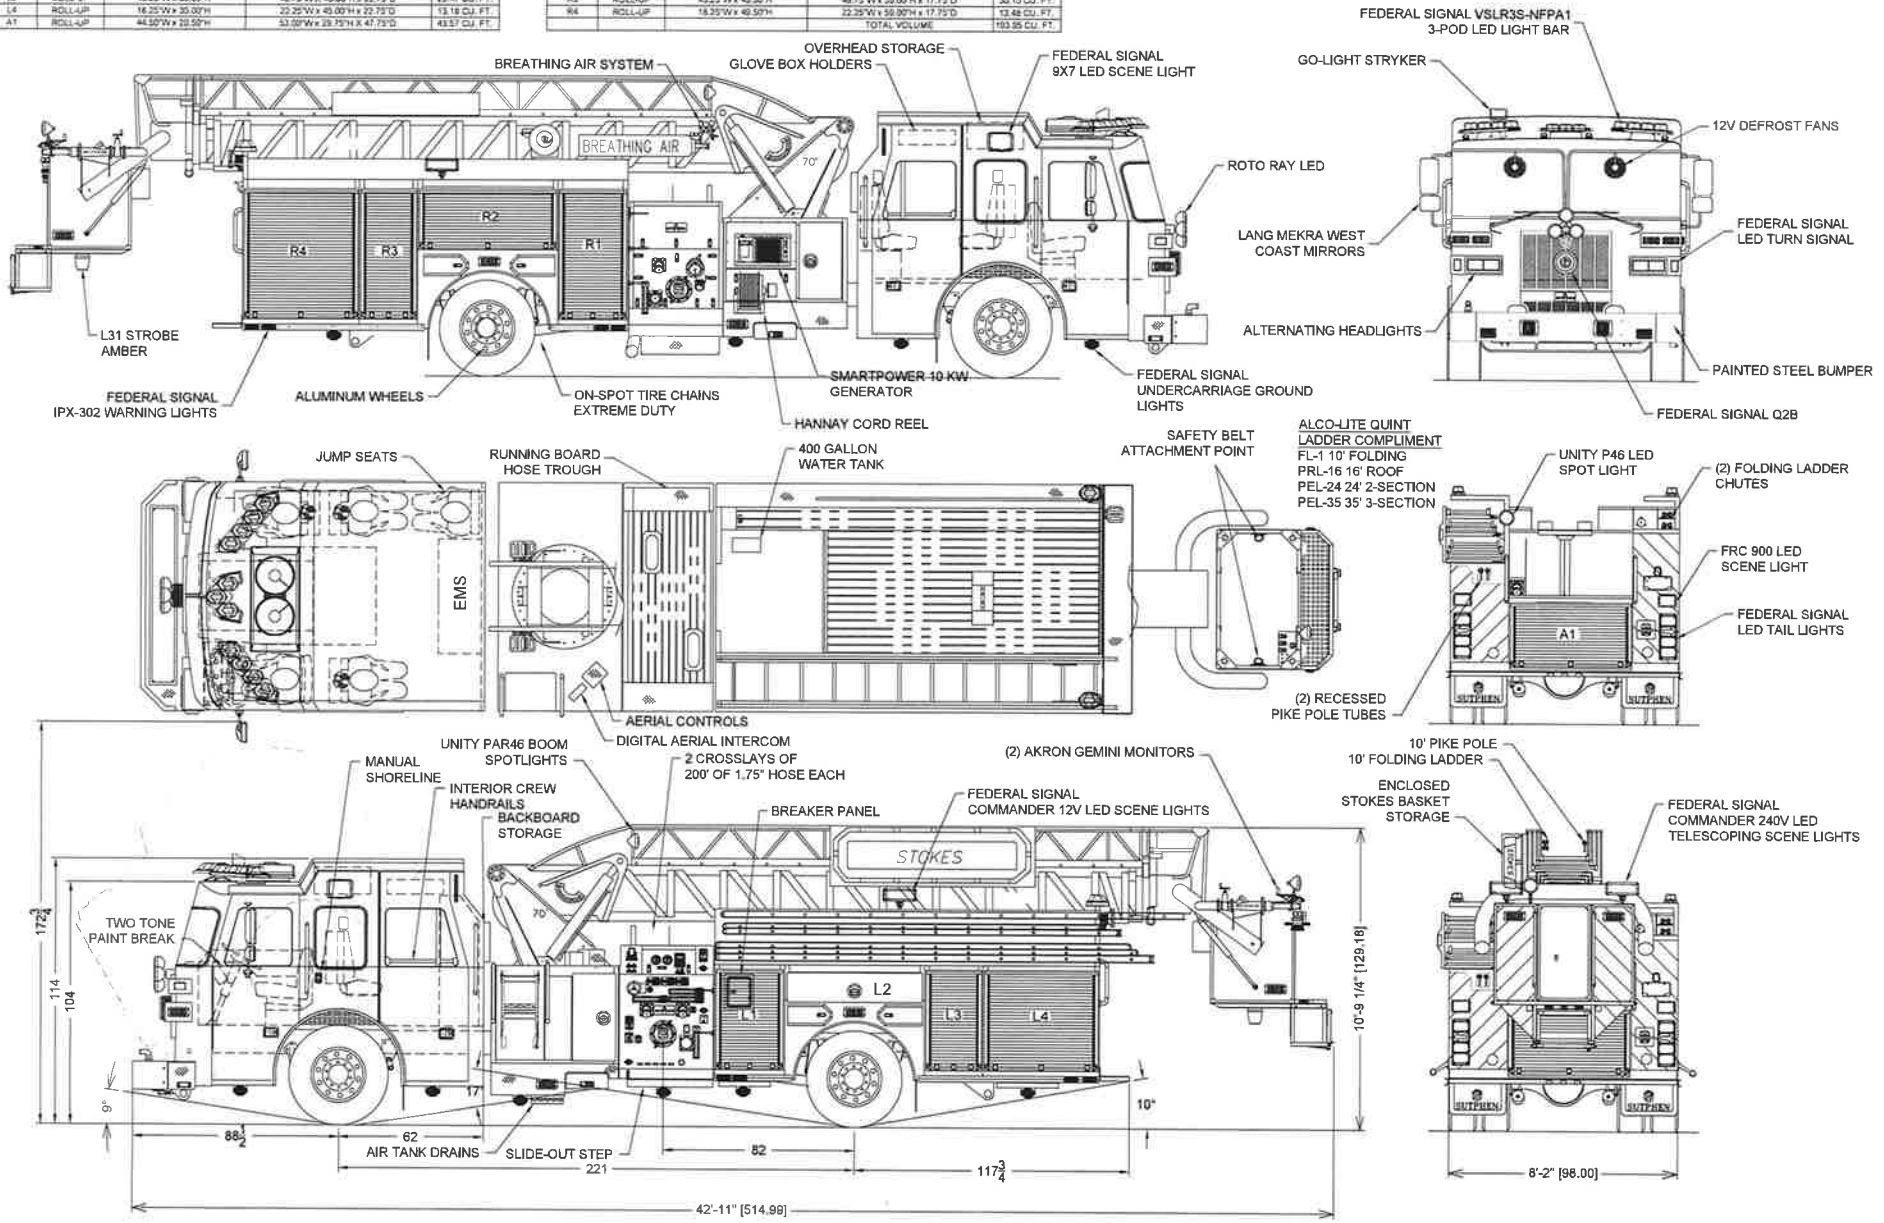

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.

IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.

DRAWING IS FOR REFERENCE ONLY, SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.

CUSTOMER APPROVAL

NAME:

TITLE:

DATE:

REV.	DESCRIPTION	BY	DATE

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.

DRAWN BY: APF

DATE: 02/29/2016

MFG. FACILITY: HILLIARD

GWINNET COUNTY FIRE/EMERGENCY SERVICES
GWINNET COUNTY, GA

SP70

DWG. NO. HS-6036