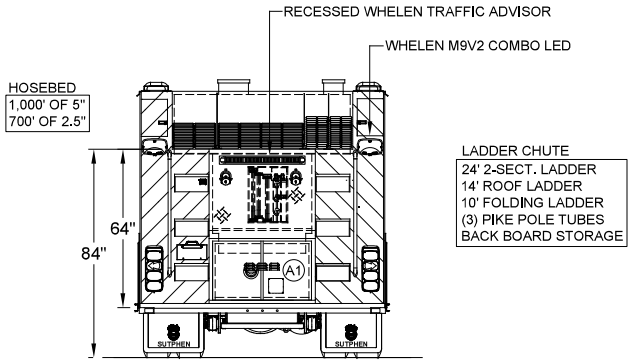

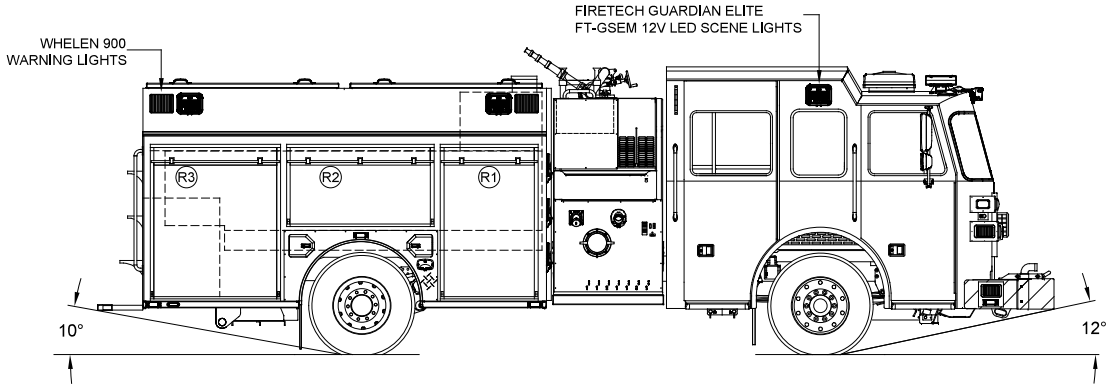

LEFT SIDE COMPARTMENTS					
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME	
L1	ROLL-UP	37.5"w X 55.4"h	43.1"w X 66"h X 25.8"d	39.6 CU. FT.	(7.5"h X 10.5"d UPPER)
L2	ROLL-UP	57.5"w X 26.2"h	61.6"w X 36.8"h X 25.8"d	29.8 CU. FT.	(7.5"h X 10.5"d UPPER)
L3	ROLL-UP	50.5"w X 55.4"h	53.4"w X 66"h X 25.8"d	49.1 CU. FT.	(7.5"h X 10.5"d UPPER)
H1	LIFT UP	(2) 75"w X 9.5"h	162"w X 17.3"h X 12.5"d	20.3 CU. FT.	

RIGHT SIDE COMPARTMENTS					
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME	
R1	ROLL-UP	37.5"w X 55.4"h	43.1"w X 66"h X 25.8"d	39.6 CU. FT.	(7.5"h X 10.5"d UPPER)
R2	ROLL-UP	57.5"w X 26.2"h	61.6"w X 36.8"h X 25.8"d	29.8 CU. FT.	(7.5"h X 10.5"d UPPER)
R3	ROLL-UP	50.5"w X 55.4"h	53.4"w X 66"h X 25.8"d	49.1 CU. FT.	(7.5"h X 10.5"d UPPER)
H2	LIFT-UP	(2) 75"w X 9.5"h	162"w X 17.3"h X 12.5"d	20.3 CU. FT.	

REAR STEP COMPARTMENT				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
A1	DOUBLE	37.8"w X 21.7"h	43"w X 28"h X 31"d	21.6 CU. FT.
			TOTAL:	299.0 CU.FT.

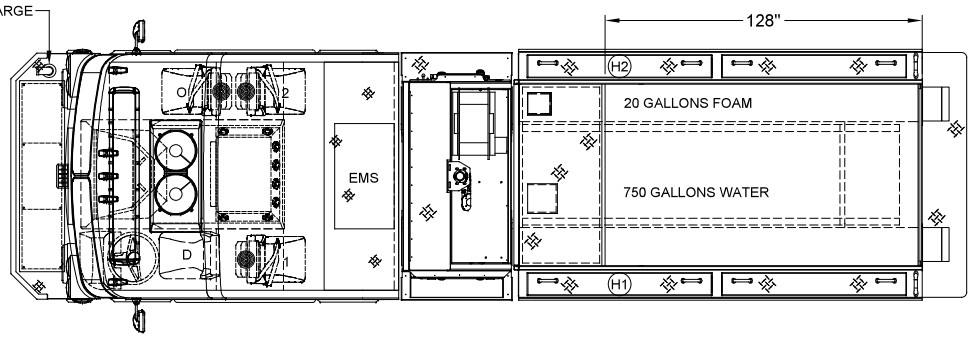

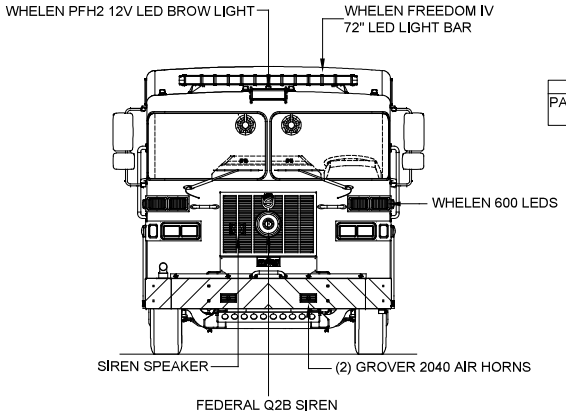

TWO TONE CAB
PAINT BREAK OPTION #1
BLACK OVER RED

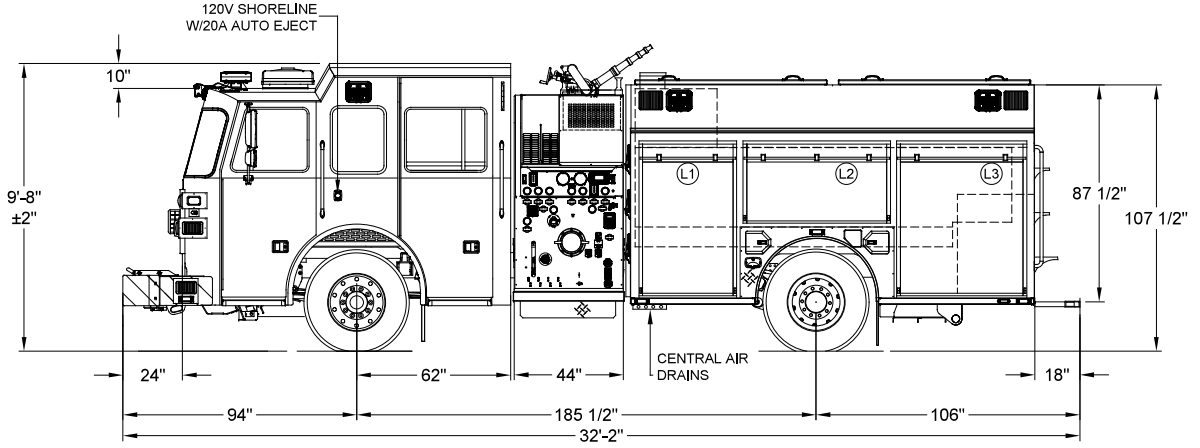

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.

IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.

DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.

CUSTOMER APPROVAL

NAME:

TITLE:

DATE:

REV.	DESCRIPTION	BY	DATE
H	ADDED WHELEN 600 WARNING LIGHTS TO THE BUMPER SIDES	KMG	12/07/2021
G	A COUPLE OF MINOR CORRECTIONS TO THE COMPT DIMS BLOCK ON DWG	RM	10/01/2021
F	CHANGED FRONT & REAR TIRES FROM GOODYEAR TO MICHELIN	KMG	08/10/2021
E	ADDED ADDITIONAL HANDRAILS TO THE BODY & UPDATED CLAR NOTES	KMG	07/29/2021

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.

DRAWN BY: KMG

DATE: 8/27/20

MFG. FACILITY: DUBLIN

SUTPHEN

DEARBORN FIRE DEPARTMENT
DEARBORN, MI

CUSTOM PUMPER - (S9)

DWG. NO.: HS-6885