COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
L1	ROLL-UP	23.25"W x 49.50"H	29.75"W x 59.00"H x 17.75"D	18.02 CU. FT.
L2	ROLL-UP	53.25"W x 19.50"H	60.00"W x 28.25"H x 17.75"D	17.41 CU. FT.
L3	ROLL-UP	18.25"W x 49.50"H	24.75"W x 59.00"H x 17.75"D	14.99 CU. FT.
L4	ROLL-UP	48.25"W x 49.50"H	52.25"W x 59.00"H x 17.75"D	31.67 CU. FT.
A1	ROLL-UP	44.50"W x 20.50"H	53.00"W x 29.75"H X 52.75"D	48.13 CU. FT.

COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
R1	ROLL-UP	23.25"W x 20.00"H	29.75"W x 30.00"H x 22.75"D	11.75 CU. FT.
R3	ROLL-UP	18.25"W x 20.00"H	22.75"W x 30.00"H x 22.75"D	8.98 CU. FT.
R4	ROLL-UP	48.25"W x 20.00"H	52.25"W X 30.00"H x 22.75"D	20.60 CU. FT.
			TOTAL VOLUME	171.55 CU. FT.

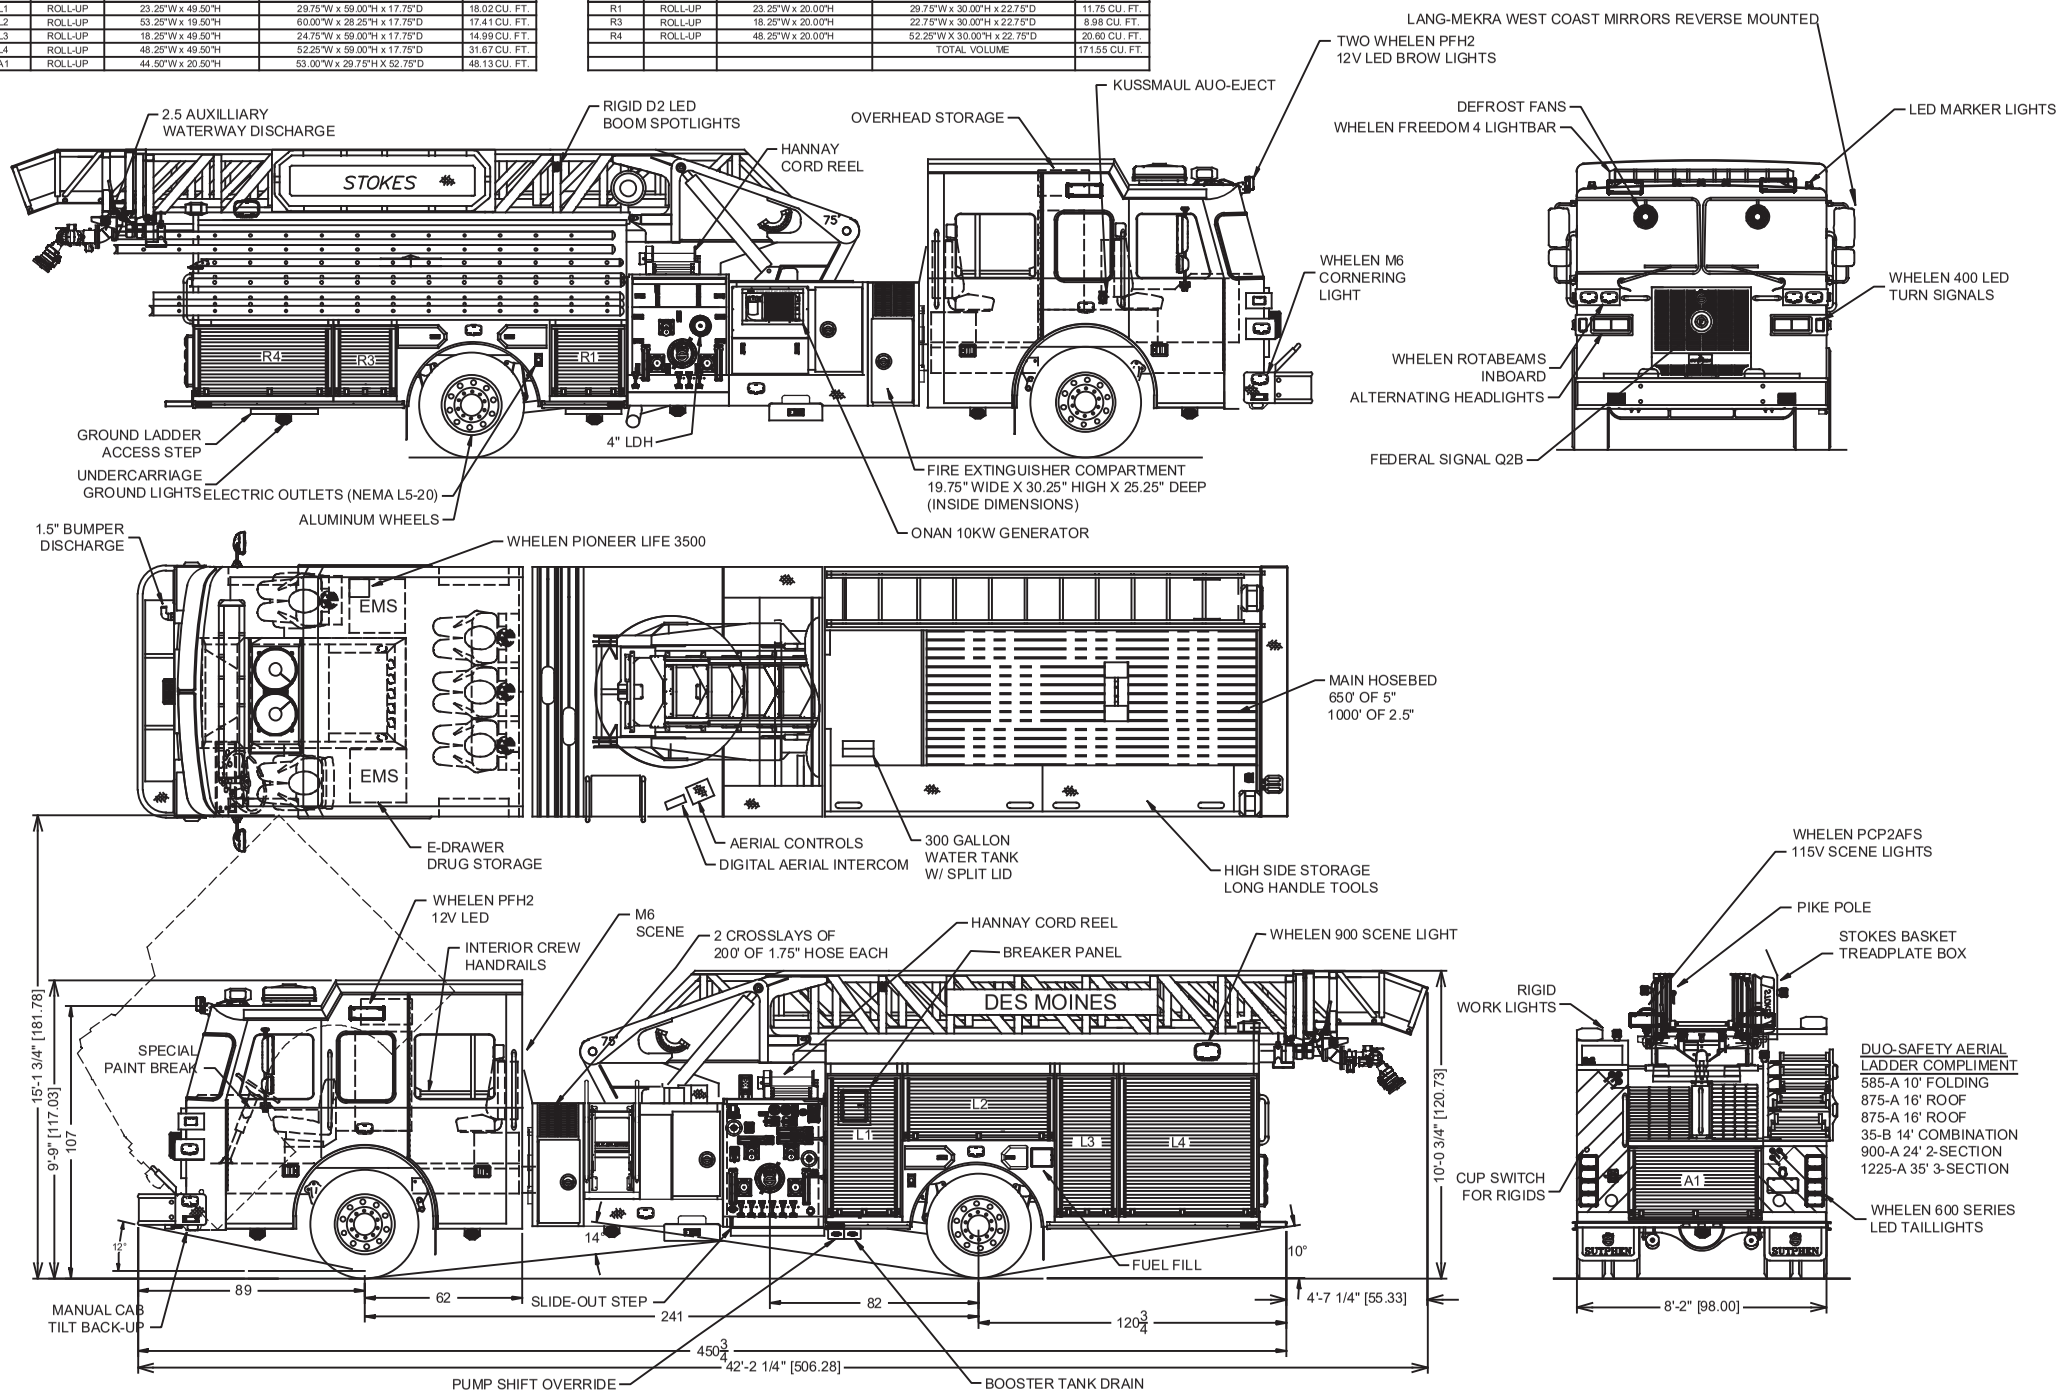

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.

IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.

DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.

CUSTOMER APPROVAL

NAME: _____

TITLE: _____

DATE: _____

REV.	DESCRIPTION	BY	DATE
B.0	SCENELIGHTS	CAM	10/4/18
A.0	PRE-CON	CAM	9/27/18

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.

DRAWN BY: CAM

DATE: 8/2/2018

MFG. FACILITY: HILLIARD

SUTPHEN

DES MOINES FIRE DEPARTMENT
DES MOINES, IA

SL75

DWG. NO.: HS-6327 & 6328