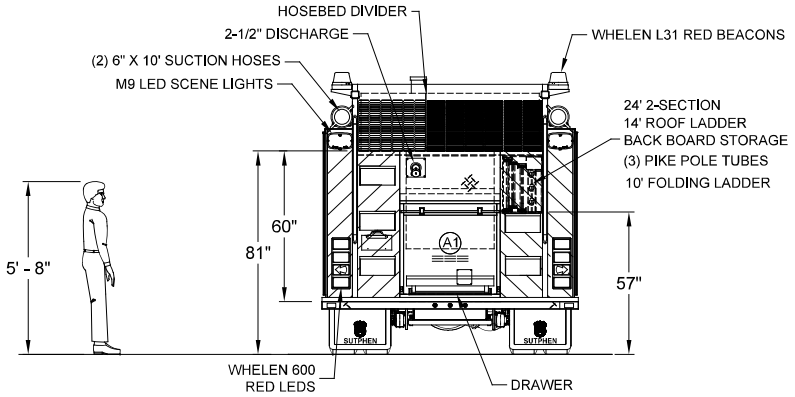

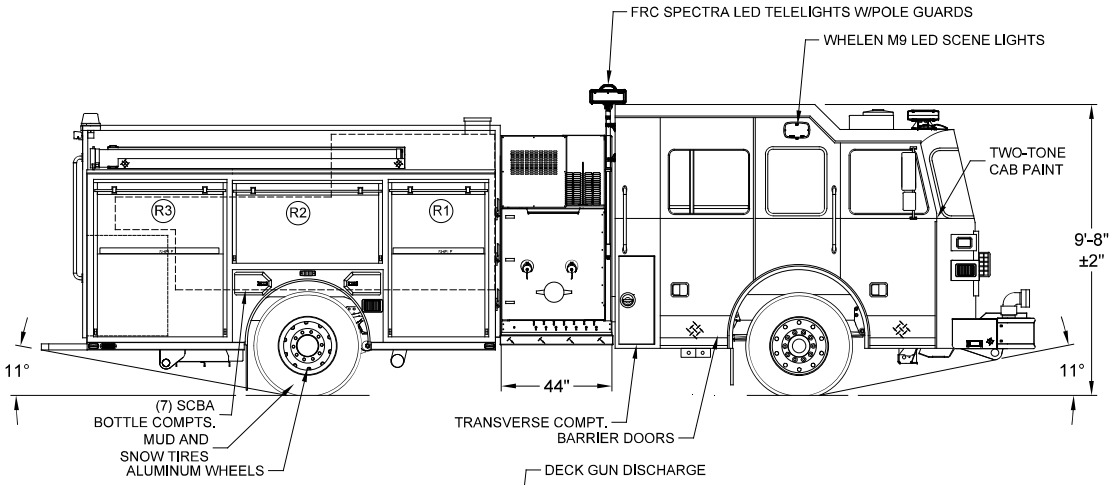

LEFT SIDE COMPARTMENTS					
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME	
L1	ROLL-UP	33.5"w X 55.4"h	43.1"w X 66"h X 27.3"d	40.8 CU. FT.	(10"h X 10.5"d UPPER)
L2	ROLL-UP	53.5"w X 26.2"h	61.6"w X 36.8"h X 27.3"d	29.8 CU. FT.	(10"h X 10.5"d UPPER)
L3	ROLL-UP	46.5"w X 55.4"h	53.4"w X 66"h X 27.3"d	50.5 CU. FT.	(10"h X 10.5"d UPPER)

RIGHT SIDE COMPARTMENTS					
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME	
R1	ROLL-UP	33.5"w X 55.4"h	43.1"w X 66"h X 27.3"d	31.1 CU. FT.	(33"h X 10.5"d UPPER)
R2	ROLL-UP	53.5"w X 26.2"h	61.6"w X 36.8"h X 10.5"d	13.8 CU. FT.	
R3	ROLL-UP	46.5"w X 55.4"h	53.4"w X 66"h X 27.3"d	38.6 CU. FT.	(33"h X 10.5"d UPPER)

REAR STEP COMPARTMENT				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
A1	ROLL-UP	37.5"w X 30.8"h	40"h X 40"w X 31"d	28.7 CU. FT.
			TOTAL:	233.3 CU.FT.

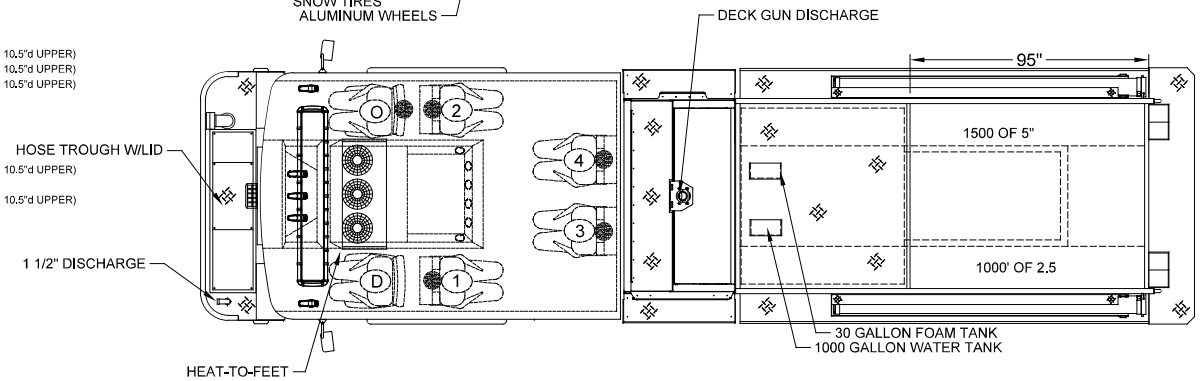

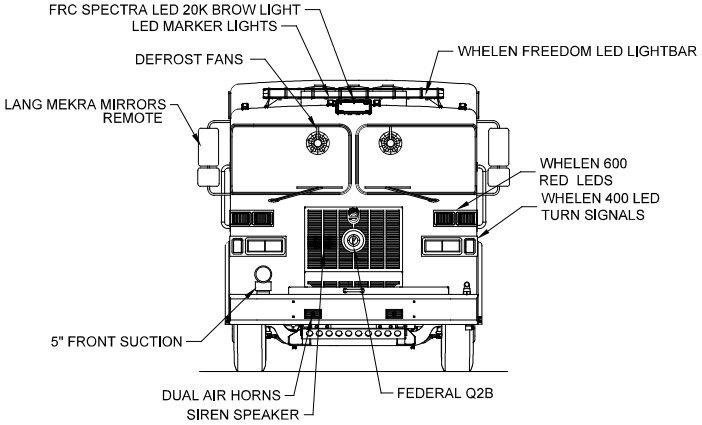

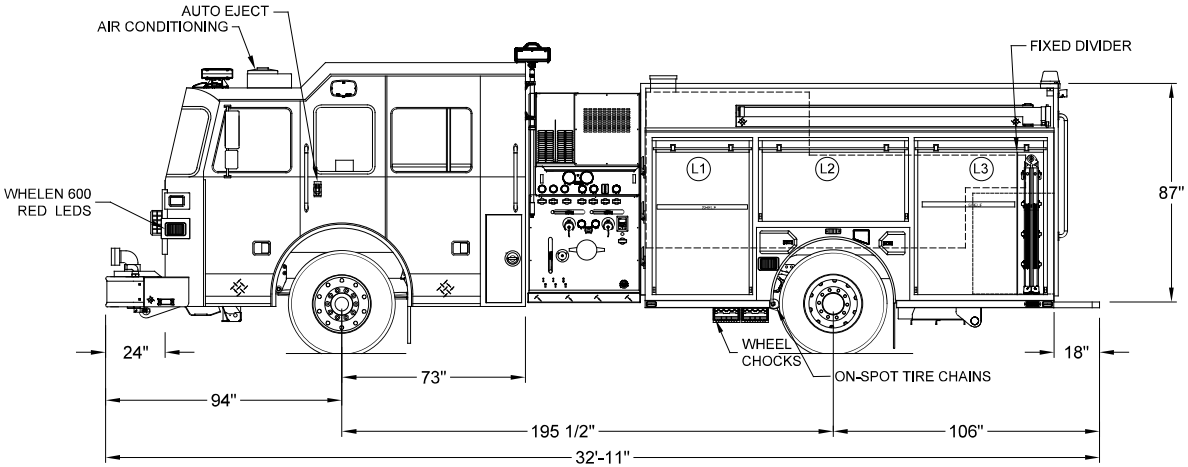

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.

IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.

DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.

CUSTOMER APPROVAL

NAME: _____

TITLE: _____

DATE: _____

REV.	DESCRIPTION	BY	DATE
B	CONPONENT REPORT UPDATED.	MJC	08/27/18
A	AFTER-PRE-CON	MJC	12/6/16

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.

DRAWN BY: FAULKNER

DATE: 5/15/17

MFG. FACILITY: DUBLIN

SUTPHEN

HS-6076 DEMO 436 (NORTHEAST DEMO)
DUBLIN, OHIO

CUSTOM PUMPER - S2 BODY (STAINLESS BODY AND SUBFRAME)

DWG. NO. HS-6076