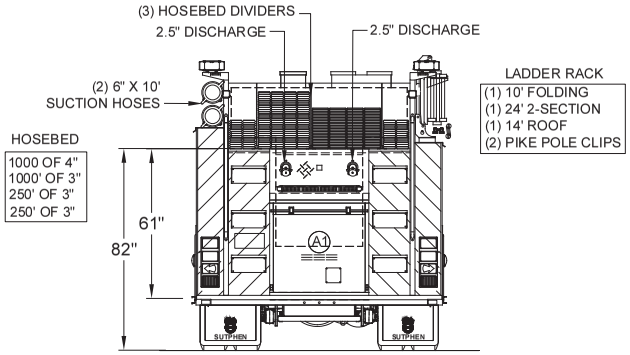

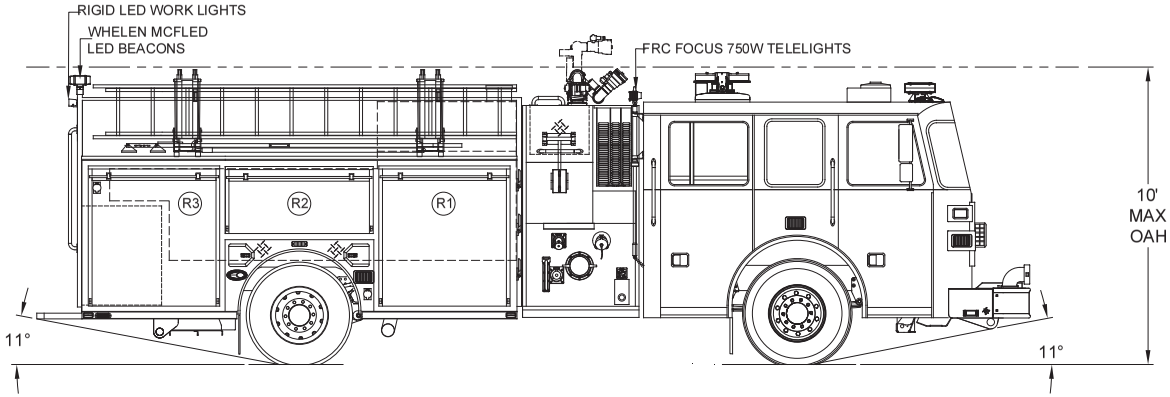

LEFT SIDE COMPARTMENTATION				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
L1	ROLL-UP	50"w X 56 7/8"h	56 1/2"w X 66"h X 27 1/4"d	58 CU. FT.
L2	ROLL-UP	57"w X 27 5/8"h	61 1/2"w X 36 1/2"h X 27 1/4"d	35 CU. FT.
L3	ROLL-UP	50"w X 56 7/8"h	53 1/2"w X 66"h X 27 1/4"d	55 CU. FT.

RIGHT SIDE COMPARTMENTATION				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
R1	ROLL-UP	50"w X 50 7/8"h	56 1/2"w X 60"h X 27 1/4"d	53 CU. FT.
R2	ROLL-UP	57"w X 21 5/8"h	61 1/2"w X 30 1/2"h X 27 1/4"d	29 CU. FT.
R3	ROLL-UP	50"w X 50 7/8"h	53 1/2"w X 60"h X 27 1/4"d	50 CU. FT.

REAR STEP COMPARTMENTS				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
A1	ROLL-UP	37 1/2"w X 31"h	40"h X 40"w X 30 1/2"d	27 CU. FT.

TOTAL STORAGE: 307 CU.FT.

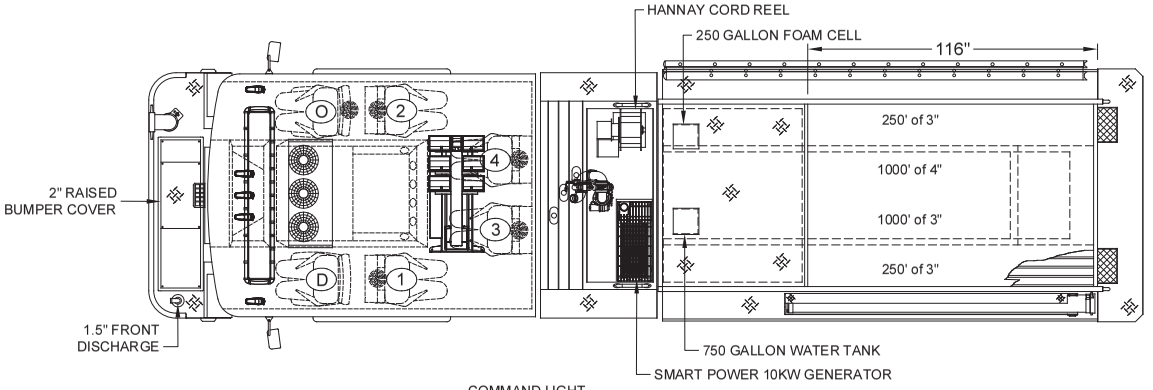

TWO-TONE CAB
BLACK OVER RED
PAINT BREAK MATCH HS-5257

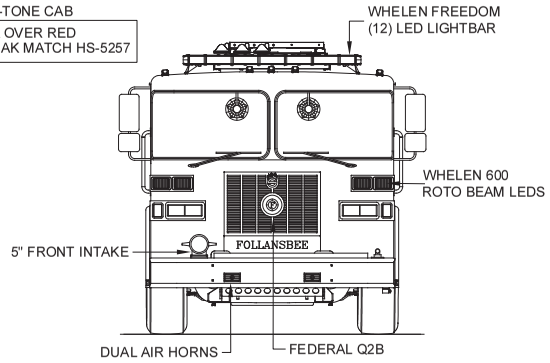

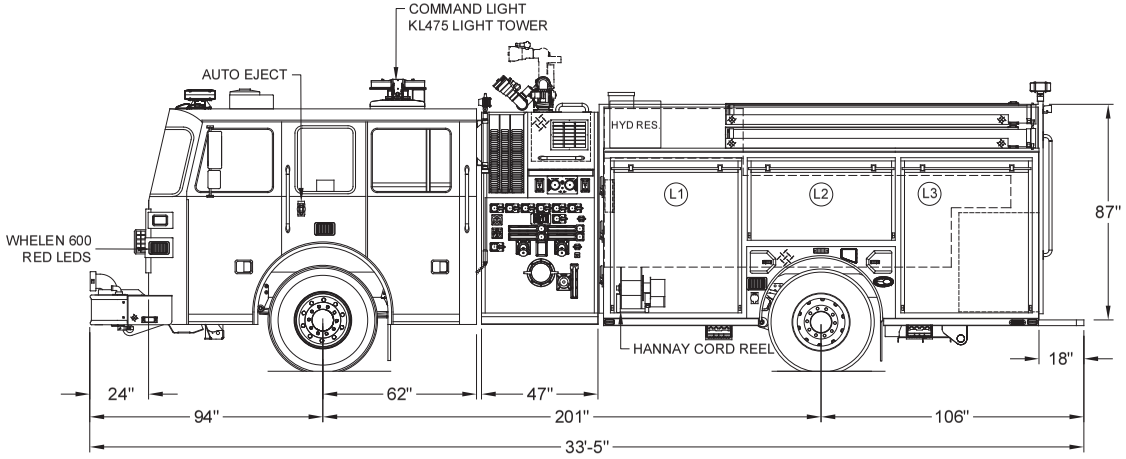

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.

IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.

DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.

CUSTOMER APPROVAL

NAME:

TITLE:

DATE:

REV.	DESCRIPTION	BY	DATE
B	ADD HYD. RESERVOIR FOR FOAM SYSTEM	MJC	4/29/19
A	AFTER-PRECON	MJC	7/30/18

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.

DRAWN BY: M.CLARK

DATE: 10/16/17

MFG. FACILITY: DUBLIN

SUTPHEN

FOLLANSBEE V.F.D.
FOLLANSBEE, WV

CUSTOM PUMPER - PA-5 BODY

DWG. NO.: HS-6268