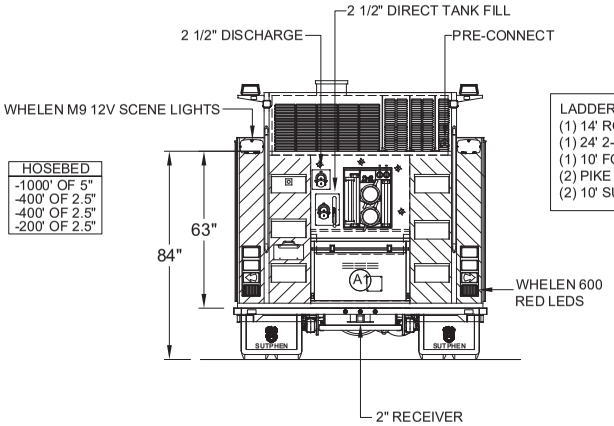

LADDER CHUTE
(1) 14' ROOF
(1) 24' 2-SEC
(1) 10' FOLDING
(2) PIKE POLE STOR
(2) 10' SUCTION HOSE

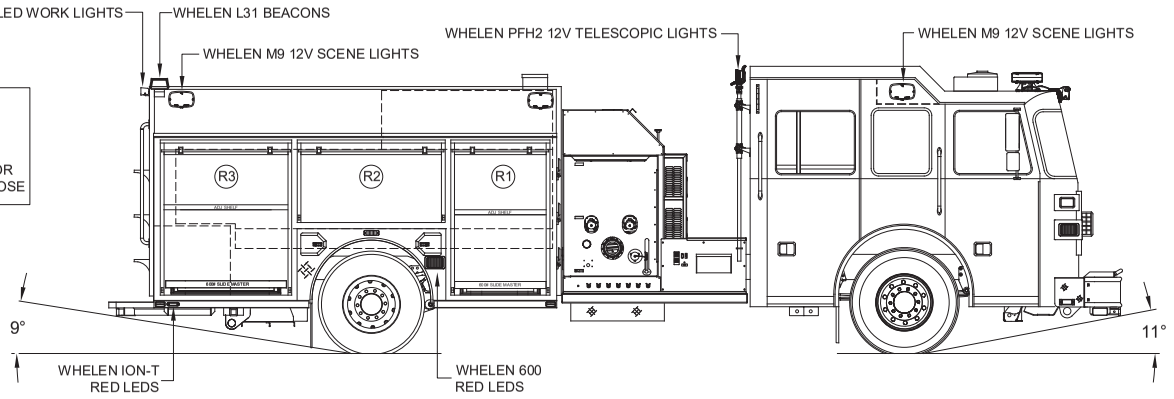

LEFT SIDE COMPARTMENTS					
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME	
L1	ROLL-UP	37.5"w X 55.4"h	43.1"w X 66"h X 25.8"d	38.7 CU. FT.	(10"h X 10.5"d UPPER)
L2	ROLL-UP	57.5"w X 26.2"h	61.6"w X 36.8"h X 25.8"d	28.4 CU. FT.	(10"h X 10.5"d UPPER)
L3	ROLL-UP	50.5"w X 55.4"h	53.4"w X 66"h X 25.8"d	47.9 CU. FT.	(10"h X 10.5"d UPPER)

RIGHT SIDE COMPARTMENTS					
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME	
R1	ROLL-UP	37.5"w X 55.4"h	43.1"w X 66"h X 25.8"d	38.7 CU. FT.	(10"h X 10.5"d UPPER)
R2	ROLL-UP	57.5"w X 26.2"h	61.6"w X 36.8"h X 25.8"d	28.4 CU. FT.	(10"h X 10.5"d UPPER)
R3	ROLL-UP	50.5"w X 55.4"h	53.4"w X 66"h X 25.8"d	47.9 CU. FT.	(10"h X 10.5"d UPPER)

REAR STEP COMPARTMENT				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
A1	ROLL-UP	40.5"w X 18.8"h	28"h X 43"w X 31"d	21.6 CU. FT.
			TOTAL:	251.4 CU.FT.

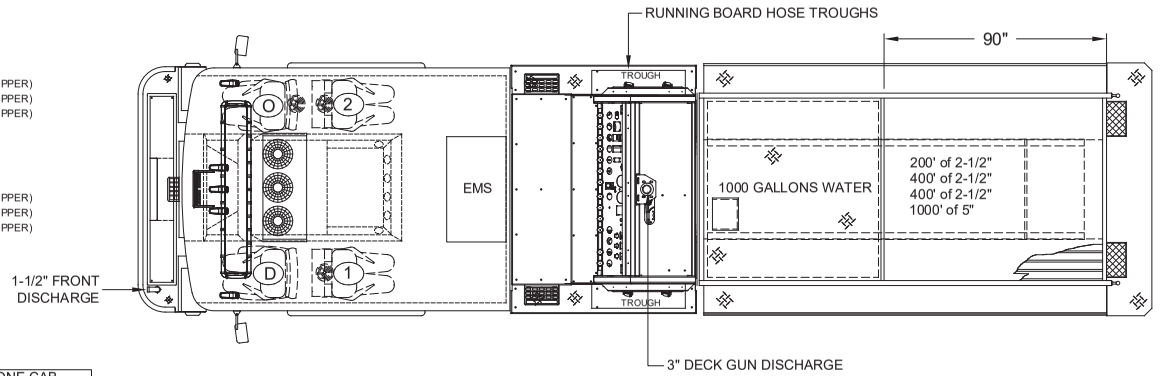

TWO TONE CAB
PAINT BREAK OPTION #1
BLACK OVER RED

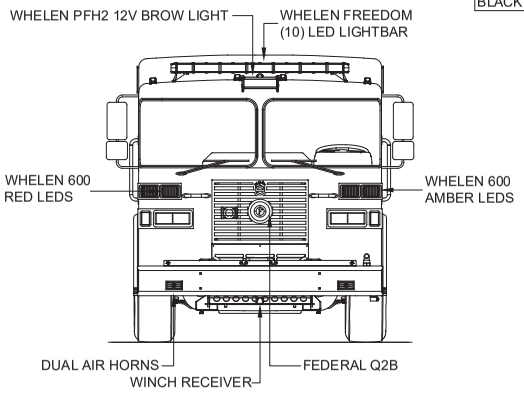

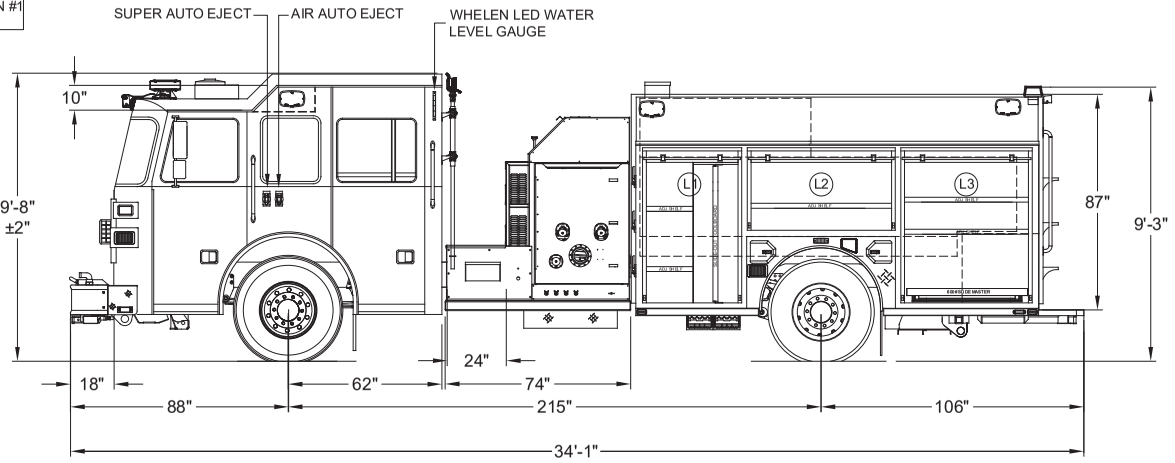

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.	CUSTOMER APPROVAL	E	REV-E SHOP ORDER (ADDED FRONT OF CAB GRAB RAILS)	KMG	08/17/20	DRAWN BY: KMG	SUTPHEN
IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.	NAME:	D	REV-D SHOP ORDER	KMG	05/06/20	DATE: 10/03/19	CHIPPEWA TOWNSHIP FIRE DEPARTMENT DOYLESTOWN, OH
DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.	TITLE:	C	REV-C SHOP ORDER	KMG	04/17/20	MFG. FACILITY: DUBLIN	CUSTOM PUMPER - S9 BODY
	DATE:	B	REV-B SHOP ORDER	KMG	03/23/20		DWG. NO.: HS-6609
		REV.	DESCRIPTION	BY	DATE		

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.