COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
L1	HINGED	16.25"W x 35.25"H	HYDRAULIC AND WHEEL CHOCKS	N/A
L2	HINGED	32.75"W x 19.25"H	41.25"W x 17.50"Hx 12.50"D	5.22 CU. FT.
L3	HINGED	49.25"W x 19.25"H	57.75"W x 17.50"Hx 12.50"D	7.31 CU. FT.
L4	HINGED	31.75"W x 43.50"H	37.75"W x 46.50"H x 26.50"D	26.91 CU. FT.
L5	HINGED	38.50"W x 43.50"H	45.50"W x 46.50"H X 26.50"D	32.44 CU. FT.
L6	HINGED	15.50"W x 33.25"H	22.50"W x 36.25"H X 26.50"D	12.50 CU. FT.

COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
R1	HINGED	16.25"W x 35.25"H	23.25"W x 38.25"H x 26.50"D	13.64 CU. FT.
R2	HINGED	32.75"W x 19.25"H	41.25"W x 17.50"H x 12.50"D	5.22 CU. FT.
R3	HINGED	49.25"W x 19.25"H	57.75"W x 17.50"H x 26.50"D	15.49 CU. FT.
R4	HINGED	31.75"W x 43.50"H	37.75"W x 46.50"H x 26.50"D	26.91 CU. FT.
R5	HINGED	38.50"W x 43.50"H	45.50"W x 46.50"H X 26.50"D	32.44 CU. FT.
R6	HINGED	15.50"W x 33.25"H	22.50"W x 36.25"H X 26.50"D	12.5 CU. FT.
A1	HINGED	25"W x 9.50"H	25"W x 9.50"H X 88" D	12.09 CU. FT.
			TOTAL VOLUME	202 CU. FT.

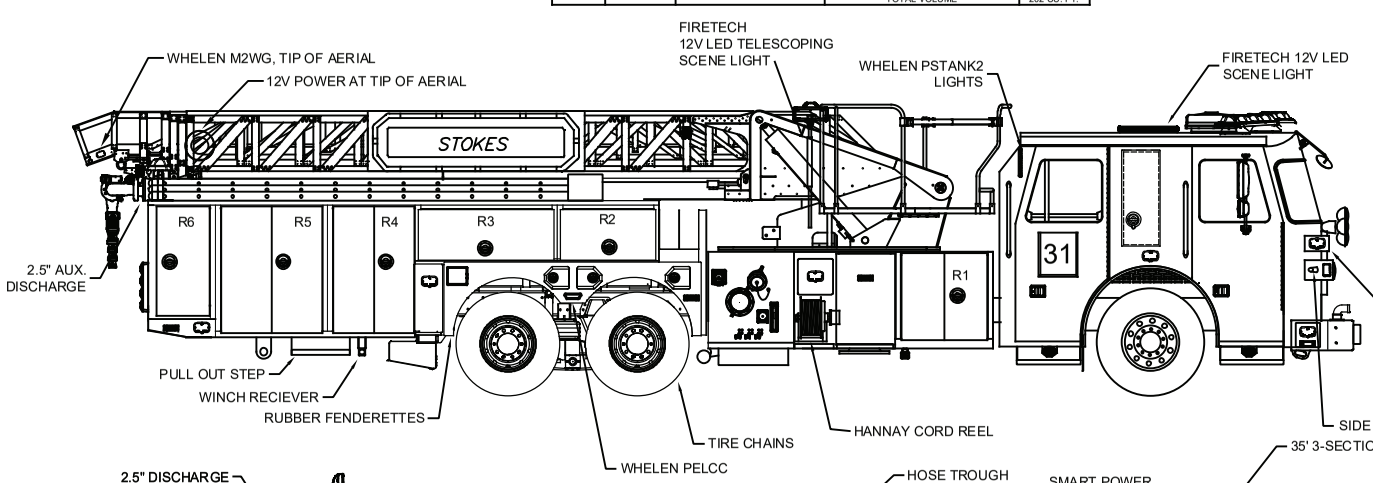

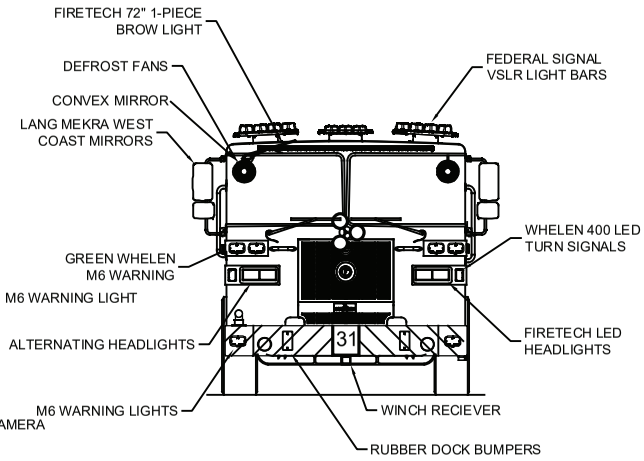

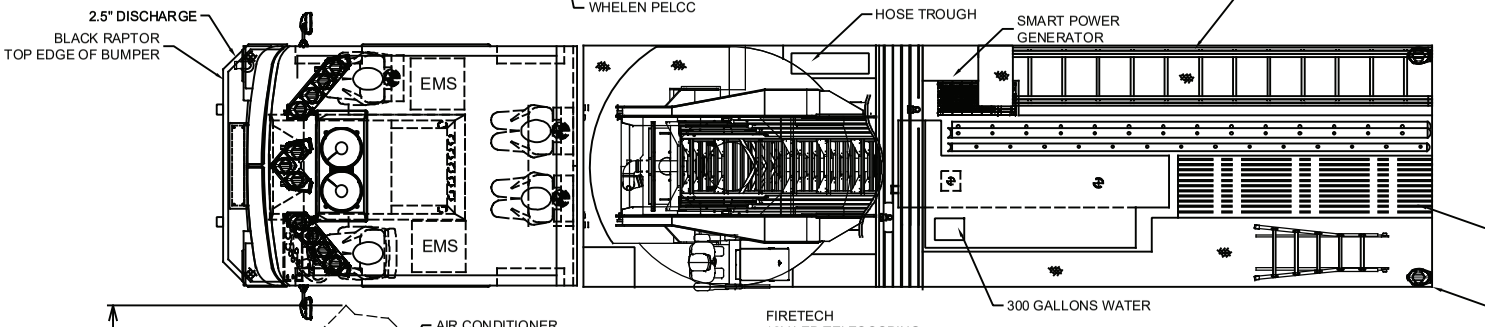

DUO SAFETY
143' LADDER COMPLIMENT
10' FOLDING - FLY SECTION OF AERIAL
10' FOLDING - LADDER BANKING
16' ROOF - BASE SECTION OF AERIAL
16' ROOF - LADDER BANKING
35' 3-SECTION - TOP OF OFFICER SIDE BODY
28' 2-SECTION - LADDER BANKING
28' 2-SECTION - LADDER BANKING

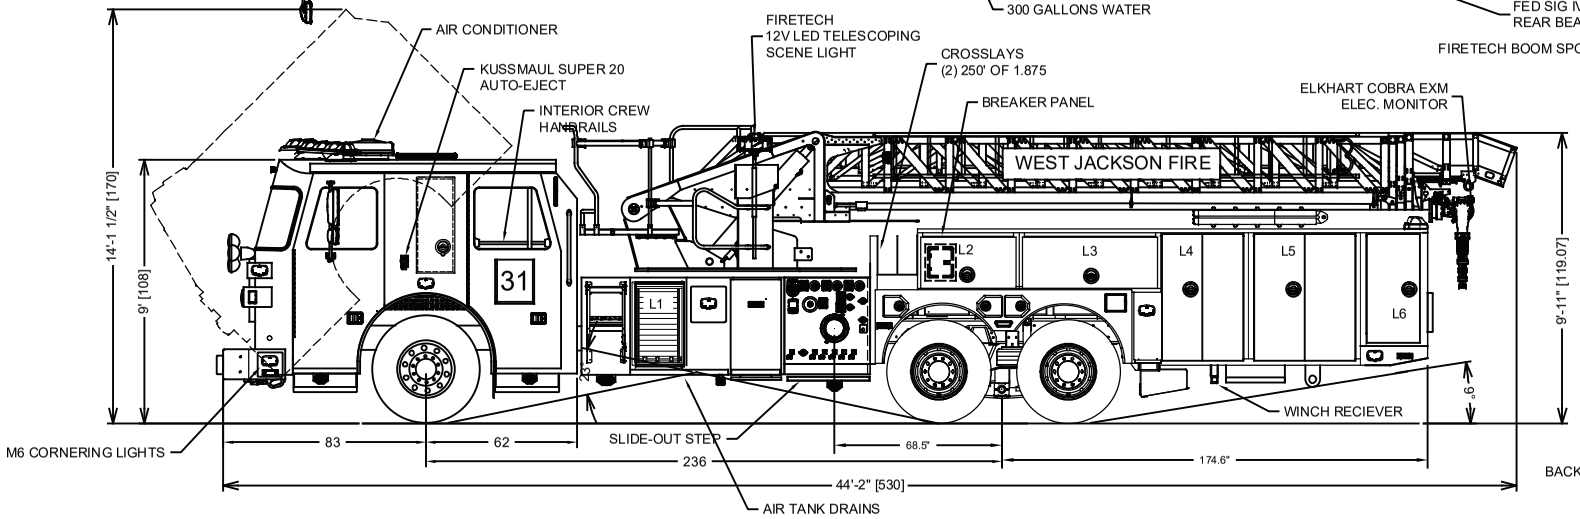

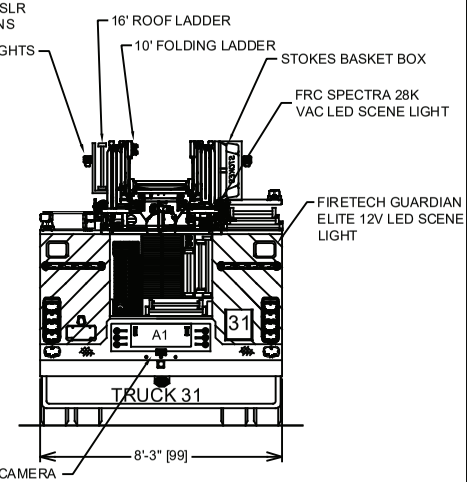

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.

IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.

DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.

CUSTOMER APPROVAL

NAME:

TITLE:

DATE:

REV.	DESCRIPTION	BY	DATE
D.0	BUMPED TO MATCH SHOP ORDER	CAM	1/21/2021

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.

DRAWN BY: CAM

DATE: 03/13/2020

MFG. FACILITY: HILLIARD

SUTPHEN

WEST JACKSON FIRE DEPT.
WEST JACKSON, GA

SL100

DWG. NO.: HS-6945