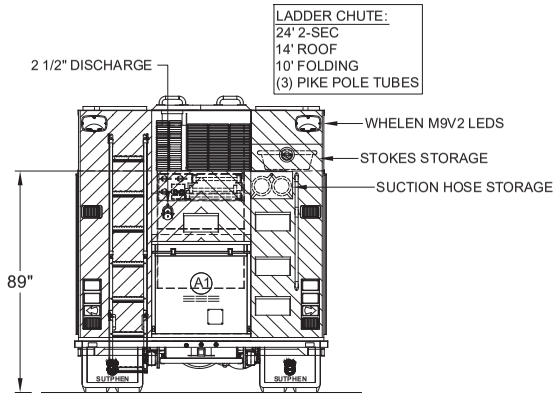

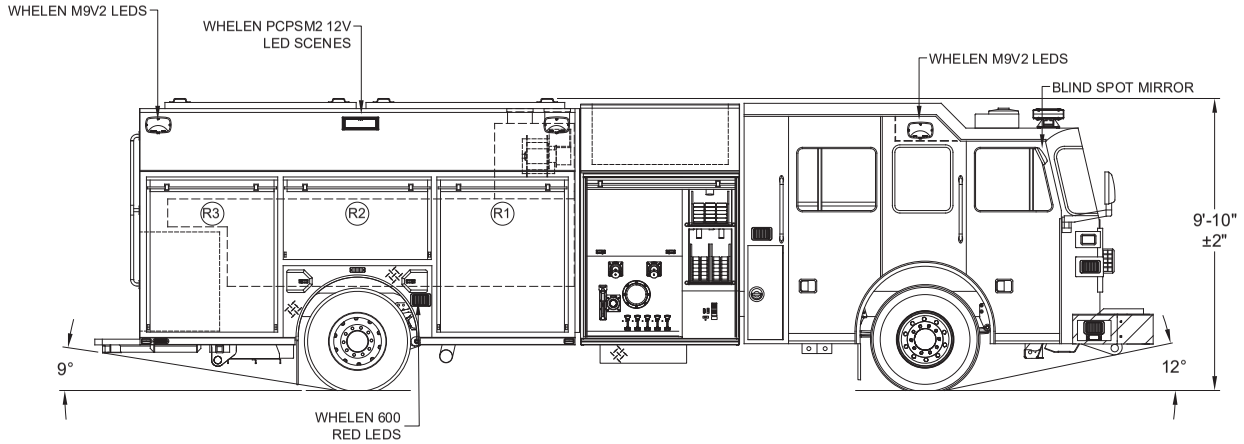

LEFT SIDE COMPARTMENTS				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
L1	ROLL-UP	50.5"w X 55.4"h	56.1"w X 66"h X 27.3"d	58.5 CU. FT.
L2	ROLL-UP	57.5"w X 26.2"h	61.6"w X 36.8"h X 27.3"d	35.8 CU. FT.
L3	ROLL-UP	50.5"w X 55.4"h	52.4"w X 66"h X 27.3"d	55.7 CU. FT.
H1	LIFT-UP	(2) 23.25"l X 73.25"w	174.7"w X 24.8"h X 29.2"d	73.2 CU. FT.

RIGHT SIDE COMPARTMENTS				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
R1	ROLL-UP	50.5"w X 55.4"h	56.1"w X 66"h X 27.3"d	58.5 CU. FT.
R2	ROLL-UP	57.5"w X 26.2"h	61.6"w X 36.8"h X 27.3"d	35.8 CU. FT.
R3	ROLL-UP	50.5"w X 55.4"h	52.4"w X 66"h X 27.3"d	55.7 CU. FT.
H2	LIFT-UP	(2) 23.25"l X 73.25"w	174.7"w X 24.8"h X 29.2"d	73.2 CU. FT.

REAR STEP COMPARTMENT				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
A1	ROLL-UP	37.5"w X 30.8"h	40"h X 40"w X 31"d	28.7 CU. FT.
			TOTAL:	475.2 CU.FT.

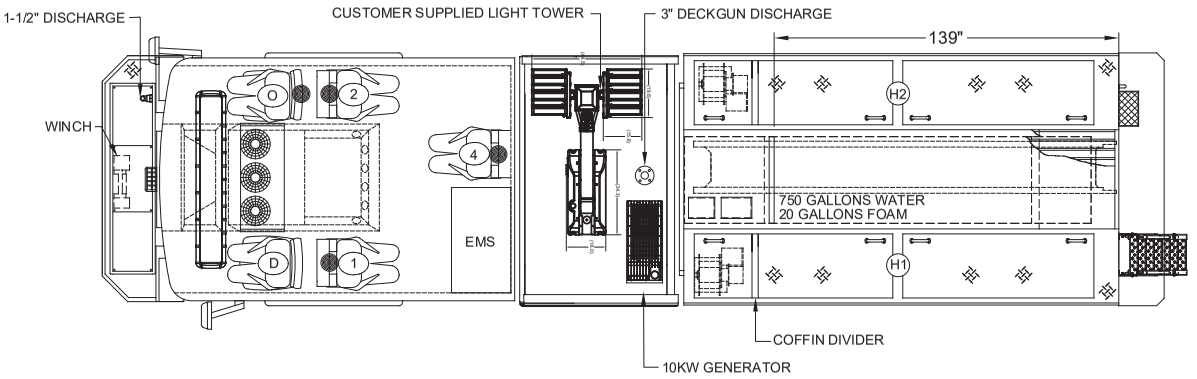

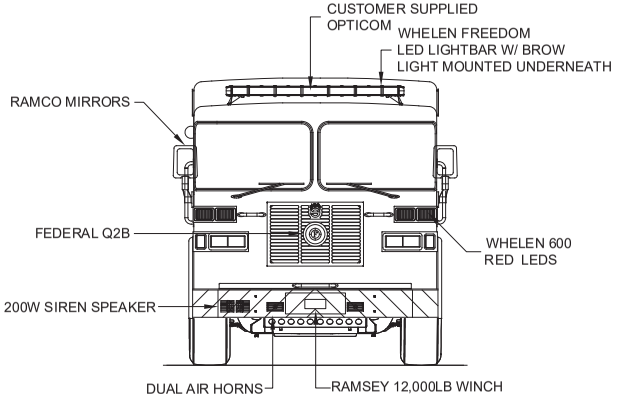

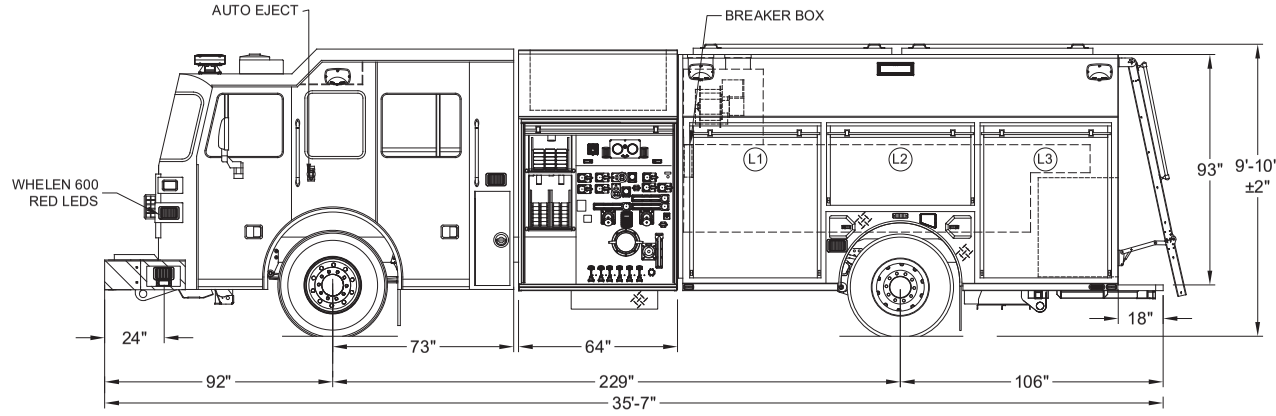

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.

IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.

DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.

CUSTOMER APPROVAL

NAME: _____

TITLE: _____

DATE: _____

REV.	DESCRIPTION	BY	DATE
K	REV-K.SHOP.ORDER	KG	07/25/19
J	REV-J.SHOP.ORDER	KG	07/10/19
I	REV-I.SHOP.ORDER	KG	06/20/19
H	REV-H.SHOP.ORDER	KG	06/04/19

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.

DRAWN BY: K.GOON

DATE: 07/31/18

MFG. FACILITY: DUBLIN

SUTPHEN

LIBERTY TOWNSHIP FIRE DEPARTMENT
POWELL, OH

CUSTOM PUMPER - PA-16 BODY

DWG. NO.: HS-6277